

Castors, Legs & Glides



- high quality furniture fittings



The technical descriptions and dimensions in this catalogue, also those with the photographs and drawings, are not binding. We reserve the right to make design improvements.

We bear no liability for any misprints or other errors that might occur in the production of the catalogue.

SISO A/S tager forbehold for trykfejl samt ændringer i produktets specifikationer.

Für Druckfehler und Irrtümer ist jede Haftung ausgeschlossen. Produktänderungen behalten wir uns vor.




SISO A/S
MILEPARKEN 11
DK - 2740 SKOVLUNDE
(COPENHAGEN)
DENMARK
PHONE: (+45) 45 830 900

DISTRIBUTOR

CONTENTS	3-4
TWIN WHEEL CASTORS	5-10
TEA TROLLEY & BALL CASTORS	11-12
FORK CASTOR "HADRIAN" - BEECH WOOD	13
FORK CASTORS W/TOP PLATE & PU WHEEL	14-16
FORK CASTORS W/TOP PLATE & ALU WHEEL	17-19
BOX CASTORS	20-22
BRASS CASTOR "BRASCELLA"	23
FORK CASTOR "GARDA" - Ø76 MM	24
FORK CASTOR "CAESAR" W/TOP PL. & PU TRACK	25-27
FORK CASTORS W/TOP PL. & PU TRACK - STEEL "NERO"	28-29
FORK CASTORS W/TOP PL. & PU TRACK - STEEL "BRUTUS"	30-34
CHOOSE THE RIGHT CASTOR	35
ALU & STEEL LEGS	36-38
TABLE METAL LEGS W/HEIGHT ADJUSTER & LEG BRACKETS	39



"WEKA" LEG CONNECTOR	40-41	
"X-TREME" LEG CONNECTOR	42-43	
"CONAN" LEG CONNECTOR	44-45	
"TWISTER" & "MINI TWISTER" LEG CONNECTOR	46-48	
"TWIST´N TURN" LEG CONNECTOR	49	
"RIMA"THE LEG CONNECTOR F/SQUARE LEGS	50-51	
"CURLY" MULTIFUNCTIONAL FOLDING LEG BRACKET	52-53	
ADJUSTABLE GLIDES	54-60	
PANEL SHOES	61	
NAIL-ON GLIDES	62-63	
KNOCK-IN GLIDES & FELT PADS	64-65	
BUMPER DISCS & SUCTION PADS	66	
TUBE SLIDES	67-68	
WASHERS & SPACERS	69	
INSERT GLIDES & CAPS	69-74	

TWIN WHEEL CASTOR W/TOP PLATE

- high quality furniture fittings

TWIN WHEEL CASTOR W/TOP PLATE

Material: Wheel: Polyamid (PA), black.
Top plate: 2 mm steel, bright zinc plated.

Application: Premounted top plate 42 x 42 mm or
38 x 38 mm.


With or without brake.




No brake



mm




mm




mm



static
kg



mm



mm




With brake



mm




mm




mm



static
kg



mm



mm

# 08.04.003	30	43	32	15	25 x 25	38 x 38 x 2
# 08.04.029	40	56	41	25	32 x 32	42 x 42 x 2
# 08.04.097	50	64	47	30	32 x 32	42 x 42 x 2

# 08.04.005	30	43	32	15	25 x 25	38 x 38 x 2
# 08.04.028	40	56	41	25	32 x 32	42 x 42 x 2
# 08.04.096	50	64	47	30	32 x 32	42 x 42 x 2

TWIN WHEEL CASTOR W/KNOCK-IN SOCKET & W/NYLON SOCKET



TWIN WHEEL CASTOR W/KNOCK-IN SOCKET

Material: Wheel: Polyamid (PA), black.
Knock-in socket: Polyamid (PA), black.

Application: Knock-in socket $\varnothing 12 \times 12$ mm
(Not premounted).


Without brake.




No brake



mm




mm




mm



static
kg



mm



mm

08.04.001

30

43

32

15

12

12

TWIN WHEEL CASTOR W/NYLON SOCKET



Material: Wheel: Polyamid (PA), black.
Socket: Polyamid (PA), black.

Application: Knock-in socket $\varnothing 10,5 \times 30$ mm
(not premounted).

Knock-in hole depth 33 mm


Without brake.



No brake



mm



mm




mm



static
kg



mm



mm

08.04.002

30

49

29

15

10,5

A

B

C

33

28

15,5

08.04.017

50

65

47

30

10,5

33

30

15,5

TWIN WHEEL CASTOR W/THREADED STEM

- high quality furniture fittings

TWIN WHEEL CASTOR W/THREADED STEM

Material: Wheel: Polyamid (PA), black.
Threaded stem: Steel, bright zinc plated.

Application: Premounted threaded stem in M8 & M10.


With or without brake.




No brake



mm




mm




mm



static
kg



M



mm

08.04.031

40

51

37

25

8

15

08.04.105

50

60

45

30

8

15

08.04.116

50

60

45

30

10


15




With brake



mm



mm




mm



static
kg



M



mm

08.04.030

40

51

37

25

8

15

08.04.110

50

60

45

30

8

15

08.04.118

50

60

45

30

10

15


TWIN WHEEL CASTOR W/U-BRACKET

TWIN WHEEL CASTOR W/U-BRACKET

Material: Wheel: Polyamid (PA), black.
U-bracket : Steel, black zinc plated.

Application: Premounted U-bracket for 16 mm panel.
With M 4 x 22 mm screw.


With brake.

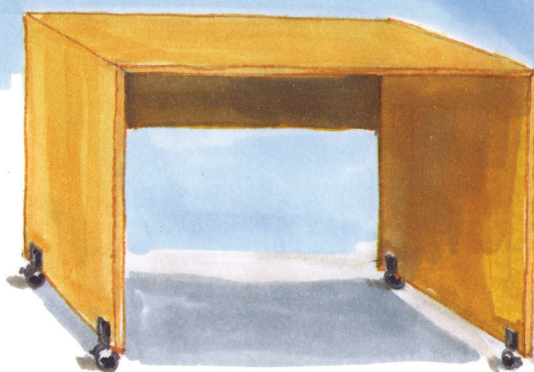


With brake



mm



mm




mm



static
kg



mm



mm

08.04.033

40

56

41

25

16

A	B	C
20,25	7,5	26


TWIN WHEEL CASTOR "LECCO" W/PU TRACK - Ø 50 MM

Material: Wheel hood & core: Polyamid (PA), black.
Wheel track: Polyurethane (PU), grey.
Top plate: 2 mm steel, bright zinc plated.


Application: Premounted top plate 42 x 42 mm.
Hole distance (c/c.) : 32 mm, Ø5 mm screw holes.
Recommended for hard surface.
Without brake.



mm




mm




mm



static/dynamic
kg



mm



mm

08.04.099

50

65

45

50/30

32 x 32

42 x 42 x 2


TWIN WHEEL CASTOR "BARI" W/PU TRACK - Ø 65 MM

TWIN WHEEL CASTOR "BARI" W/PU TRACK - Ø 65 MM



Material: Wheel hood & core: Polypropylene (PP), grey.
Wheel track: Polyurethane (PU), black.
Top plate: 2 mm steel, bright zinc plated.

Application: Premounted top plate 42 x 42 mm.
Hole distance (c/c.) : 32 mm, Ø5 mm screw holes.
Recommended for hard surface.
With or without brake.

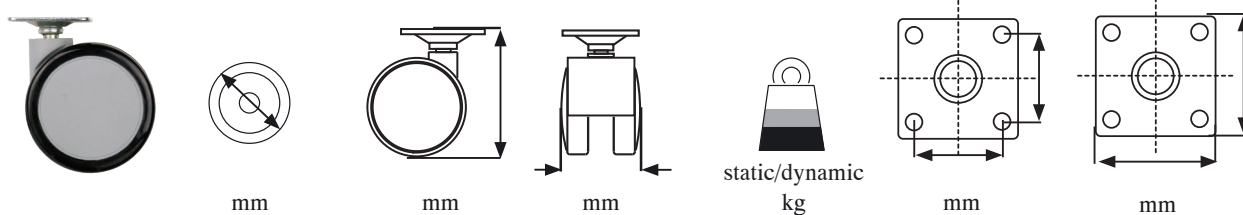

08.04.200

65

78

45

80/50

32 x 32


42 x 42 x 2




mm




mm



mm


static/dynamic
kg


mm



mm

08.04.201

65

78

45

80/50

32 x 32

42 x 42 x 2

TEA TROLLEY CASTORS "TACITUS"

- high quality furniture fittings

TEA TROLLEY CASTOR "TACITUS"


Material: Steel: White, Black or Brass plated
Wheel: Polyamid (PA), black.

Application: Premounted threaded stem in M8x15mm.
Recommended for hard surface.
With or without brake.




No brake

Colour
of
wheel



mm



mm




mm



static
kg



M



mm

# 08.01.112	White	73,5	98	11	12	8	15
# 08.01.114	Black	73,5	98	11	12	8	15
# 08.01.116	Brass	73,5	98	11	12	8	15




With brake

Colour
of
wheel



mm



mm




mm



static
kg



M



mm

# 08.01.113	White	73,5	98	11	12	8	15
# 08.01.115	Black	73,5	98	11	12	8	15
# 08.01.117	Brass	73,5	98	11	12	8	15

TEA TROLLEY "TITUS" & BALL CASTOR



TEA TROLLEY CASTOR "TITUS"

Material: Steel: Brass (BPL) or nickel Pl. (NPL).
Wheel: Polyamid (PA), black.


Application: Metal socket Ø7 x 35 mm with black plastic bushing.



FINISH



mm



mm




mm



static
kg



mm



mm


							A	B	C
# 08.01.084	BPL	38	46	8	9	10	30	17	28
# 08.01.086	NPL	39	42	8	6	10	35	30	22
# 08.01.089	NPL	50	53	10	8	10	35	30	22
# 08.01.110	NPL	75	86	11	15	10	37	34	18

BALL CASTOR W/THREADED STEM




Material: Wheel core: Polyamid (PA), CPL.
Wheel track: Polyurethane (PU), transp.
Threaded stem: Steel, bright zinc plated


Application: Premounted threaded stem in M10.
Recommended for hard surface.
May be used for glass conveyers as well as for furniture



mm



mm



mm



static
kg



mm



M

# 08.12.410	50	55	39	30	15	10
-------------	----	----	----	----	----	----

FORK CASTOR "HADRIAN"

- high quality furniture fittings



FORK CASTOR "HADRIAN"

Material: Fork: Steel, Black.
Wheel body: Beech wood
Wheel track: Polyamid (PA), black.

Application: Premounted threaded stem in 8x15mm.
Recommended for hard surface.
With or without brake.




No brake


Wood



mm



mm




mm



static
kg



M



mm

08.01.118

Beech

62

82

22

15

8

15




With brake


Wood



mm



mm




mm



static
kg



M



mm

08.01.119

Beech

62

82

22

15

8


15

FORK CASTOR W/TOP PLATE & TRANSPARENT PU WHEEL

FORK CASTOR W/TOP PLATE & TRANSPARENT PU WHEEL

Material: Wheel track: Polyurethane (PU), transparent.
Wheel body: Polyurethane (PU), transparent.
Top plate: 1,8 mm steel, zinc plated.

Application: With premounted top plate 50 x 50 mm.
Recommended for hard surface.
With or without plastic brake.

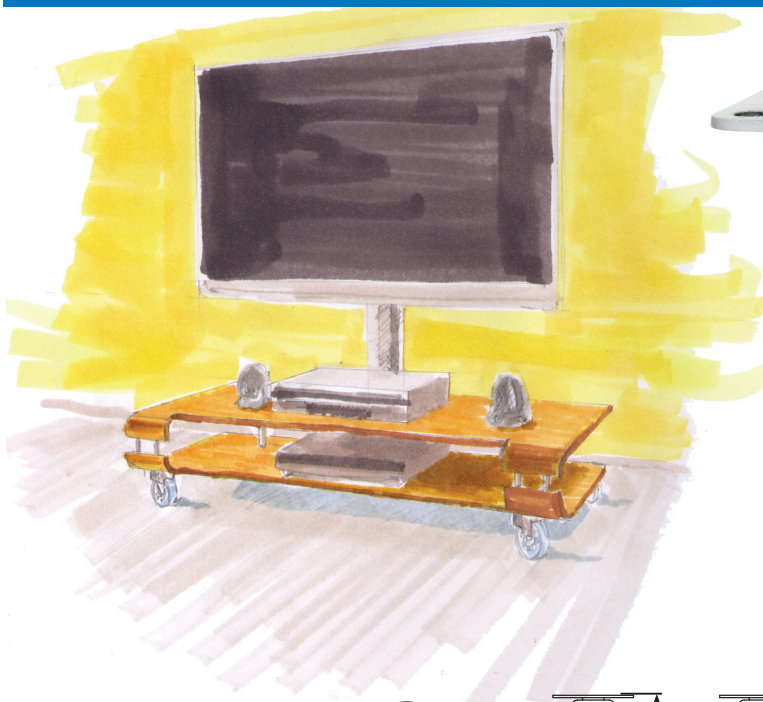

No brake



mm




mm




mm



static
kg



mm



mm



With brake



mm



mm



mm



static
kg



mm



mm

# 08.12.290	35	51	20	25	38 x 38	50 x 50 x 1,8
# 08.12.300	50	65	20	50	38 x 38	50 x 50 x 1,8
# 08.12.310	75	90	23	70	38 x 38	50 x 50 x 1,8

# 08.12.291	35	51	20	25	38 x 38	50 x 50 x 1,8
# 08.12.301	50	65	20	50	38 x 38	50 x 50 x 1,8
# 08.12.311	75	90	23	70	38 x 38	50 x 50 x 1,8

FORK CASTOR W/TOP PLATE & COLORED TRANSPARENT PU WHEEL

- high quality furniture fittings



Transparent Orange


Ø50 mm

08.12.308

**Transparent Orange
with brake**

Ø50 mm

08.12.309

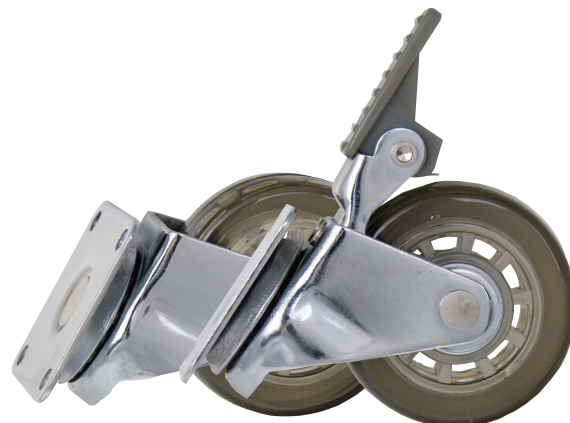

Transparent Black

Ø35 mm

08.12.292

Ø50 mm

08.12.302

Ø75 mm

08.12.312

**Transparent Black
with brake**

Ø35 mm

08.12.293

Ø50 mm

08.12.303

Ø75 mm

08.12.313



Transparent Green

Ø50 mm

08.12.306

**Transparent Green
with brake**

Ø50 mm

08.12.307



Transparent Blue

Ø50 mm

08.12.304

Ø75 mm

08.12.314

**Transparent Blue
with brake**

Ø50 mm

08.12.305

Ø75 mm

08.12.315

FORK CASTOR "SPIKE" Ø50 MM & Ø75 MM

FORK CASTOR "SPIKE" Ø50 & Ø75 MM

Material:

Wheel track: Polyurethane (PU), transparent


Wheel body: Polyurethane (PU), transparent

Top plate: 1,8 mm steel, zinc plated.

Application: With premounted top plate 50 x 50 mm.

Recommended for hard surface.

With or without plastic brake.

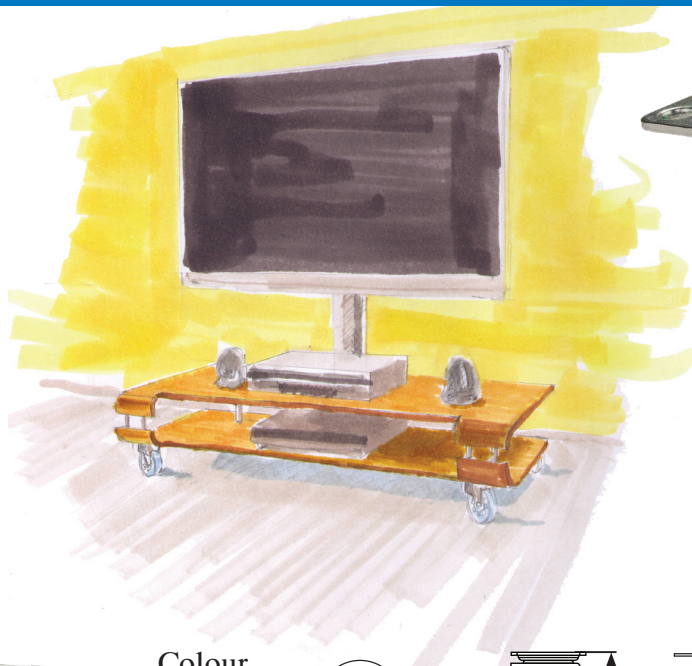

No brake


Colour
of
wheel



mm




mm




mm



static
kg



mm



mm

08.12.332

Transparent

50

64

16

35

38 x 38

50 x 50 x 1,8

08.12.336

Transparent

75

91

20

45

38 x 38

50 x 50 x 1,8



With brake


Colour
of
wheel



mm




mm




mm



static
kg



mm



mm

08.12.333

Transparent

50

64

16

35

38 x 38

50 x 50 x 1,8

08.12.337

Transparent

75

91

20

45

38 x 38

50 x 50 x 1,8

FORK CASTOR "JAC" Ø50 MM & Ø75 MM


- high quality furniture fittings

FORK CASTOR "JAC" Ø50 & Ø75 MM

Material:

Wheel track: Polyurethane (PU), Black ring
Wheel body: Bright Anodized Aluminum
Fork: Chrome Pl. Steel Fork
Top plate: 2 mm steel, zinc plated.

Application: With premounted top plate 42 x 42 mm or 60 x 60 mm.
Recommended for hard surface.
With or without plastic brake.

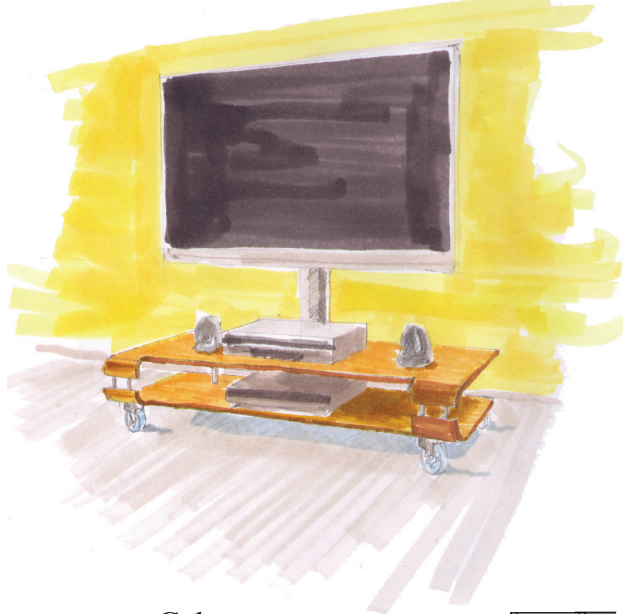


No brake


Colour
of
wheel
track



mm




mm




mm



static
kg



mm



mm

08.12.350

Black PU

50

65

20

40

32 x 32

42 x 42 x 2

08.12.355

Black PU

75

98

24

50

44 x 44

60 x 60 x 2



With brake


Colour
of
wheel
track



mm




mm




mm



static
kg



mm



mm

08.12.351

Black PU

50

65

20

40

32 x 32

42 x 42 x 2

08.12.356

Black PU

75

98

24

50

44 x 44

60 x 60 x 2


FORK CASTOR "BOB" Ø50 MM & Ø75 MM

FORK CASTOR "BOB" Ø50 & Ø75 MM

Material:

Wheel track: Polyurethane (PU), Black ring
 Wheel body: Matt Anodized Aluminum
 Fork: Alu finish, Steel Fork
 Top plate: 2 mm steel, zinc plated.

Application: With premounted top plate 42 x 42 mm or 60 x 60 mm.
 Recommended for hard surface.
 With or without plastic brake.

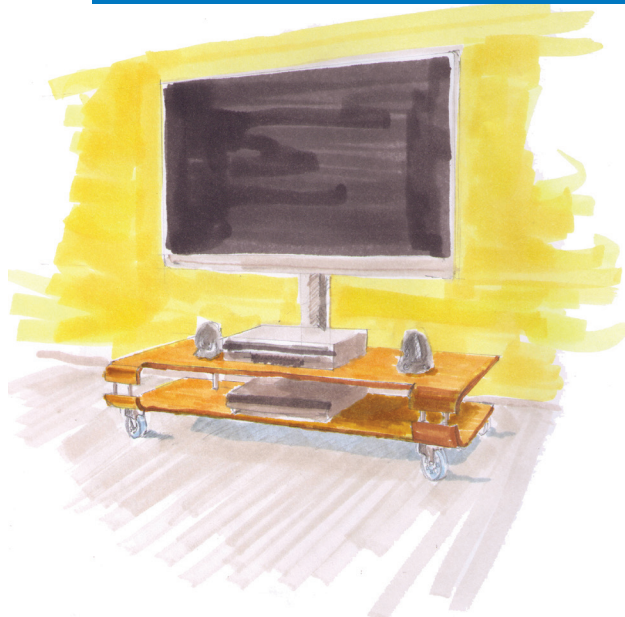

No brake

Colour
of
wheel
track



mm




mm




mm



static
kg



mm



mm

08.12.360

Black PU

50

65

20

40

32 x 32

42 x 42 x 2

08.12.365

Black PU

75

98

24

45

44 x 44

60 x 60 x 2



With brake

Colour
of
wheel
track



mm




mm



mm



static
kg



mm



mm

08.12.361

Black PU

50

65

20

40

32 x 32

42 x 42 x 2

08.12.366

Black PU

75

98

24

45

44 x 44

60 x 60 x 2

FORK CASTOR "KIKI" Ø75 MM

- high quality furniture fittings

FORK CASTOR "KIKI" Ø75 MM

Material:

Wheel track: Polyurethane (PU), Black ring

Wheel body: MattAnodized Aluminum

Fork: Alu finish, Steel Fork

Top plate: 2 mm steel, zinc plated.

Application: With premounted top plate 60 x 60 mm.

Recommended for hard surface.

With or without plastic brake.



No brake

Colour
of
wheel
track



mm




mm




mm



static
kg



mm



mm

08.12.375

Black PU

75

98

24

45

44 x 44

60 x 60 x 2



With brake

Colour
of
wheel
track



mm




mm




mm



static
kg



mm



mm

08.12.376

Black PU

75

98

24

45

44 x 44


60 x 60 x 2




BOX CASTOR - SCREW-ON W/ PP WHEEL

BOX CASTOR - SCREW-ON W/ PP WHEEL

Material: Wheel: Polypropylene (PP), white or black.
Mounting bracket: Steel, bright zinc plated.

Application: Mounting bracket: 19 x 42 mm.
Hole distance (c/c): 32 mm.

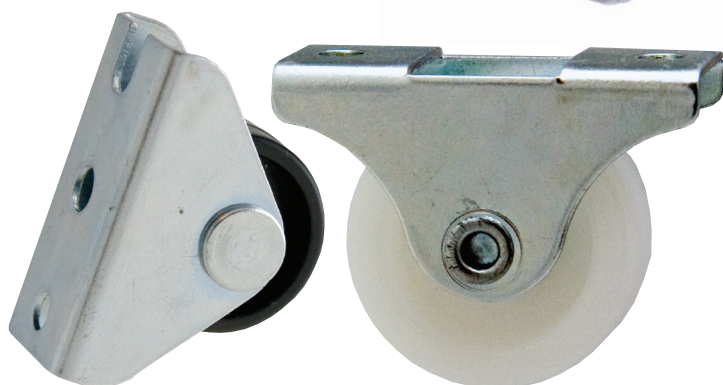






	Colour of wheel	 mm	 mm	 mm	 static kg	 mm	 mm
							A B
# 08.06.010	White	25	27	13	25	32	18/40
# 08.06.027	Black	25	28	11	25	32	18/42
# 08.06.025	White	30	33	16	25	32	21/48

BOX CASTOR - W/ PU TRACK

Material: Wheel track: Polyurethane (PU), grey.
Wheel core: Polypropylene (PP), black (Blk).
Mounting bracket: Steel, bright zinc plated.


Application: Mounting bracket: 19 x 42 mm or 20 x 58 mm.
Hole distance (c/c): 32 mm or 46 mm.
Recommended for hard surface.




		Colour of wheel						
			mm	mm	mm	static kg	mm	mm
# 08.06.040		Grey/Blk	25	28	13	25	32	A B 19/42
# 08.06.042		Grey/Blk	32	39	16	25	46	20/58
# 08.06.044		Grey/Blk	40	43	16	25	46	20/58

BOX CASTOR - INLAY TYPE & CORNER BRACKET BOX CASTOR


BOX CASTOR - INLAY TYPE

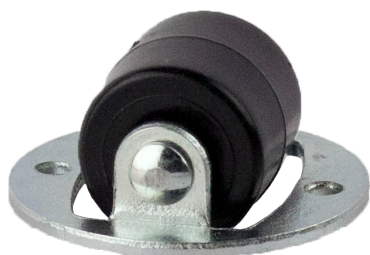


Material:	Wheel:	Polyamid (PA), black.
	Mounting ring:	Steel, bright zinc plated.
Mounting ring:		Ø26 x 1,5 mm.
Hole distance(c/c):		20 mm.
Application:		Inlay type, ideal for table legs.

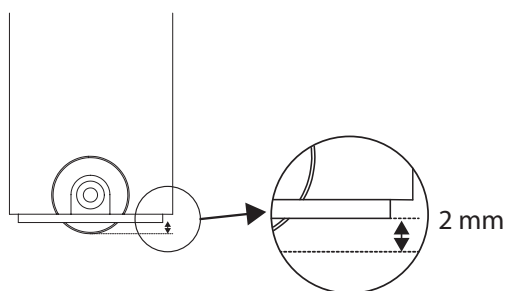

mm




mm




mm



static/dynamic
kg



mm



mm

08.06.050

Ø2,5

Ø14 mm

14 mm

30/15

20 mm

Ø26 mm

CORNER BRACKET BOX CASTOR





Material:	Wheel:	Polyamid (PA), black.
	Bracket:	Steel, zinc plated.

Size:	Wheel:	Ø28 x 14 mm
	Bracket:	146 x 37 x 2 mm
	Mounting height:	36 mm

Load capacity: 35 kg

Item No.: # 08.06.100

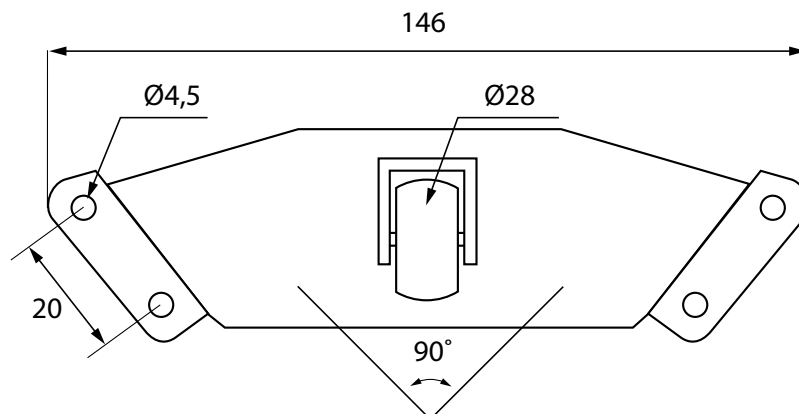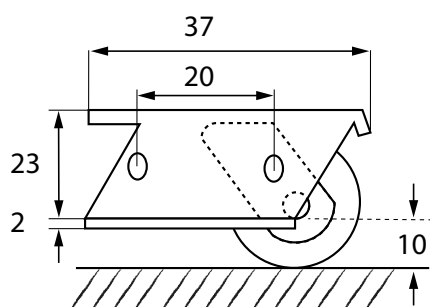




BRASS CASTOR "BRASCELLA"

- high quality furniture fittings

BRASS CASTOR "BRASCELLA"

Material: Brass: Polished brass.

Application: Mounted by use of steel head F-593
12.09.890-0 & M8 hangerbolt.
To be bought separately.

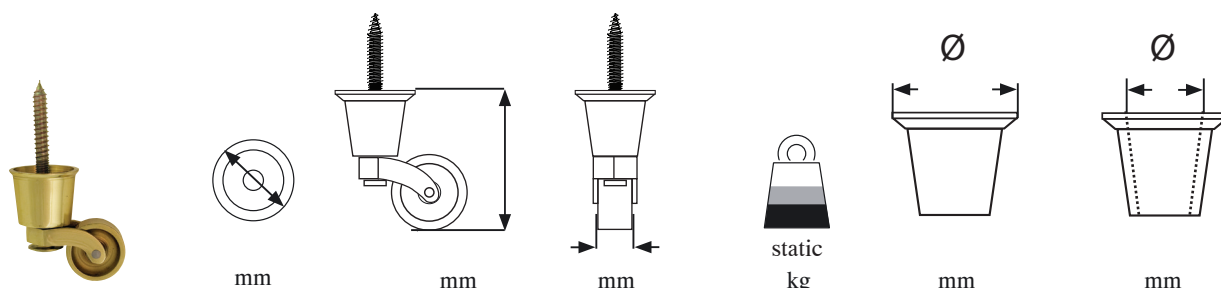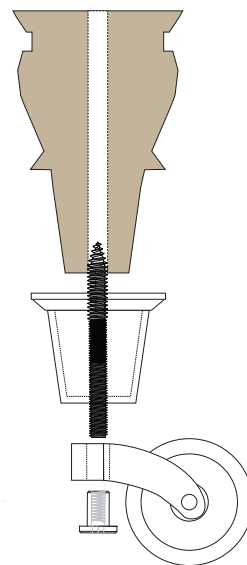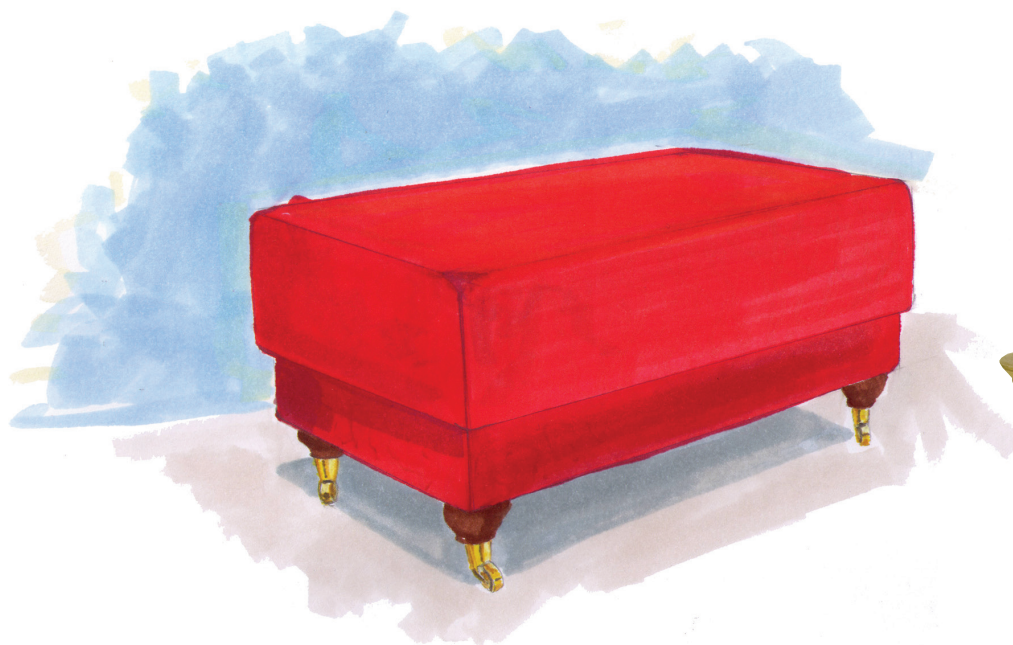

08.05.221

32

65

19

50

39

31,5

FORK CASTOR "GARDA" - Ø76 MM

FORK CASTOR "GARDA" - Ø76 MM



Material: Wheel: Polypropylene (PP), grey.
Metal parts: Steel, bright zinc pl.


Application: Premounted top plate 42 x 42 mm.
Hole distance (c/c.) : 32 mm,
Ø5 mm screw holes.
With or without brake.



No brake



mm




mm




mm



static/dynamic
kg



mm



mm



With brake



mm




mm




mm



static/dynamic
kg



mm



mm

08.12.400

76

100

47

50/25

32 x 32

42 x 42 x 1,5

08.12.405

76

100

47

50/25

32 x 32

42 x 42 x 1,5



Fork castor with full brake

STEEL FORK CASTOR "CAESAR" W/TOP PLATE & PU TRACK

Material: Wheel track: Polyurethane (PU), grey.
Wheel core: Polypropylene (PP), black.
Metal parts: Steel, bright zinc pl.

Application: Premounted top plate.
Recommended for hard surface.
With or without full brake.



Fork castor without brake




Fork castor with brake




No brake



mm




mm




mm



static/dynamic
kg



mm



mm

08.12.230

Ø50

66

22

60/35

32 x 32

42 x 42 x 1,5

08.12.232

Ø75

100

23

60/40

46 x 46

60 x 60 x 1,8




With brake



mm




mm




mm



static/dynamic
kg



mm



mm

08.12.231

Ø50

66

22

60/35

32 x 32

42 x 42 x 1,5

08.12.233

Ø75

100

21

60/40

46 x 46

60 x 60 x 1,8

FULL BRAKE # 08.12.234

Ø75

100

21

60/40

46 x 46

60 x 60 x 1,8

FORK CASTOR "CAESAR" W/HOLE FOR BOLT & PU TRACK

STEEL FORK CASTOR "CAESAR" W/HOLE FOR BOLT & PU TRACK

Material: Wheel track: Polyurethane (PU), grey.
Wheel core: Polypropylene (PP), black.
Metal parts: Steel, bright zinc pl.

Application: Hole for bolt.
Recommended for hard surface.
With or without full brake.



Fork castor with brake



Fork castor without brake




Fork castor with full brake




No brake




mm




mm



mm



static/dynamic
kg



mm

08.12.230-5

50

69,5

22

50/35

10,5

08.12.235-0

75

97

21

60/40


10,5




With brake




mm




mm



mm



static/dynamic
kg



mm

08.12.231-5

50

69,5

22

50/35

10,5

08.12.236-0

75

97

21

60/40

10,5

FULL BRAKE # 08.12.237-0

75

97

21

60/40

10,5

FORK CASTOR "CAESAR" W/THREADED STEM & PU TRACK

- high quality furniture fittings



Fork castor with full brake

STEEL FORK CASTOR "CAESAR" W/THREADED STEM & PU TRACK

Material: Wheel track: Polyurethane (PU), grey.
Wheel core: Polypropylene (PP), black.
Metal parts: Steel, bright zinc pl.

Application: Premounted threaded stem in M10 x 30 mm.
Recommended for hard surface.
With or without full brake.



Fork castor without brake




Fork castor with brake




No brake



mm



mm




mm



static/dynamic
kg



M



mm

08.12.238

75

100

21

60/40

10


30




With brake




mm



mm




mm



static/dynamic
kg



M



mm

08.12.239

75

100

21

60/40

10

30

FULL BRAKE # 08.12.240

75

100

21

60/40

10


30

FORK CASTOR "NERO" W/TOP PL. & RUBBER TRACK

STEEL FORK CASTOR "NERO" W/TOP PLATE & RUBBER TRACK

Material: Wheel: Brown soft rubber.
Metal parts: Steel, bright zinc pl.


Application: Premounted top plate.
Recommended for hard surface.
With or without brake.

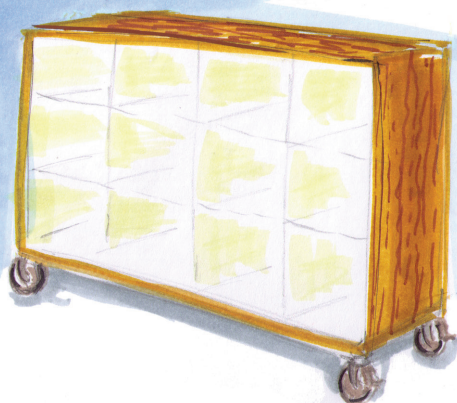


No brake



mm




mm



mm



static
kg



mm




mm




With brake



mm




mm




mm



static
kg



mm



mm

# 08.12.380	25	39	13	10	29 x 21	38 x 30 x 1,2
# 08.12.382	38	53	17	25	28 x 36	46 x 40 x 1,5
# 08.12.384	50	64	18	30	28 x 36	46 x 40 x 1,5
# 08.12.386	75	103	25	50	39 x 54	73 x 60 x 1,8

# 08.12.381	25	39	13	10	29 x 21	38 x 30 x 1,2
# 08.12.383	38	53	17	25	28 x 36	46 x 40 x 1,5
# 08.12.385	50	64	18	30	28 x 36	46 x 40 x 1,5
# 08.12.387	75	103	25	50	39 x 54	73 x 60 x 1,8

FORK CASTOR "NERO" W/THREADED STEM & RUBBER TRACK

- high quality furniture fittings




STEEL FORK CASTOR "NERO" W/THREADED STEM & RUBBER TRACK

Material: Wheel: Brown soft rubber.
Metal parts: Steel, bright zinc plated.

Application: Premounted threaded stem in M10 x 30 mm.
Recommended for hard surface.
With or without brake.



Fork castor without brake

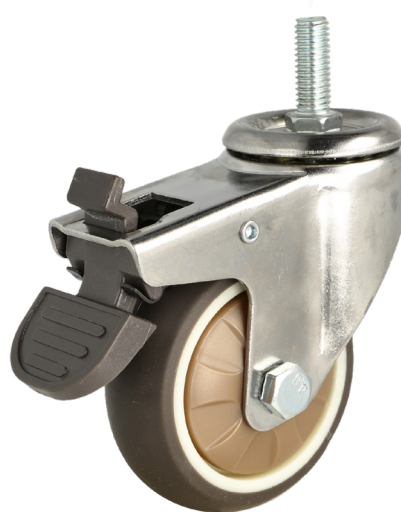


Fork castor with brake




No brake



mm



mm



mm



static
kg



M



mm

08.12.392

50

65

18,5

30

10

25

08.12.394

75

100

25

50

10


25




With brake



mm



mm



mm



static
kg



M



mm

08.12.393

50

65

18,5

30

10

25

08.12.395

75

100

25

50

10

25

FORK CASTOR "BRUTUS" W/TOP PL. & RUBBER TRACK

STEEL FORK CASTOR "BRUTUS" W/TOP PLATE & RUBBER TRACK

Material: Wheel: Grey soft rubber.
Metal parts: Steel, bright zinc pl.

Application: Premounted top plate.
Recommended for hard surface.
With or without brake.



Fork castor without brake




Fork castor with brake




No brake



mm




mm




mm



static/dynamic
kg



mm




mm




With brake



mm




mm




mm



static/dynamic
kg



mm



mm

# 08.12.161	50	72	16	45/30	35 x 35	50 x 50 x 1,5
# 08.12.163	75	100	21	60/45	45 x 45	65 x 65 x 2

# 08.12.162	50	72	16	45/30	35 x 35	50 x 50 x 1,5
# 08.12.164	75	100	21	60/45	45 x 45	65 x 65 x 2

FORK CASTOR "BRUTUS" W/TOP PL. & FULL BRAKE & RUBBER TRACK

- high quality furniture fittings



STEEL FORK CASTOR "BRUTUS" W/TOP PLATE & FULL BRAKE & RUBBER TRACK

Material: Wheel: Grey soft rubber.
Metal parts: Steel, bright zinc plated.

Application: Premounted top plate.
Recommended for hard surface.
With total brake which prevents as well swivelling as turning.




Fork castor with full brake




With brake





mm




mm



mm



mm



mm

08.12.167

75

100


21

60/45



45 x 45

65 x 65 x 2


Brake system in action

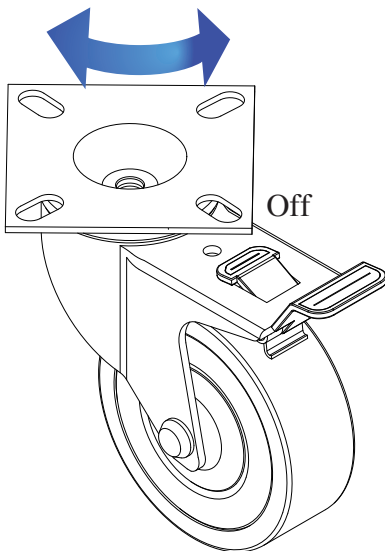

Off

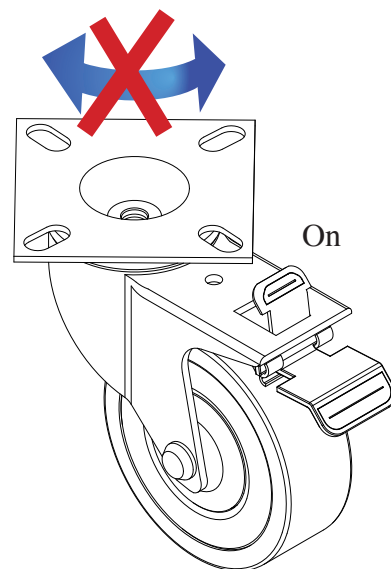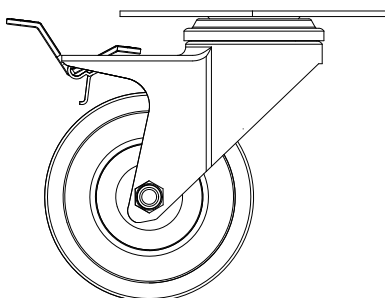

On

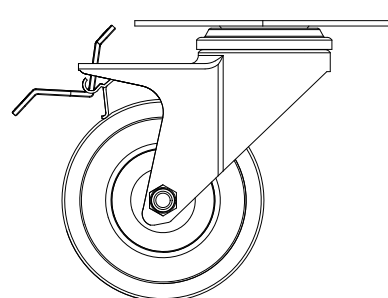


FORK CASTOR "BRUTUS" W/THREADED STEM & RUBBER TRACK



STEEL FORK CASTOR "BRUTUS" W/THREADED STEM & RUBBER TRACK

Material: Wheel: Grey soft rubber.
Metal parts: Steel, bright zinc plated.

Application: Premounted threaded stem in M10 x 30 mm.
Recommended for hard surface.
With or without brake.

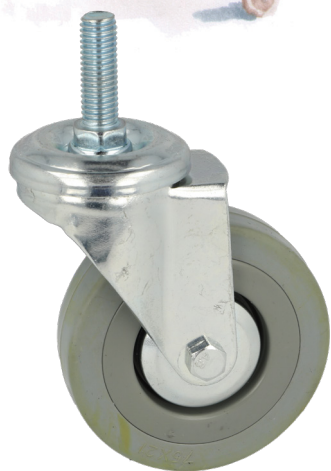

Fork castor without brake




Fork castor with brake




No brake




mm



mm



mm



M



mm

08.12.165

75

98

21

60/45

10


30




With brake




mm



mm



mm



M



mm

08.12.166

75

98

21

60/45

10

30

FORK CASTOR "BRUTUS" W/HOLE FOR BOLT & RUBBER TRACK

- high quality furniture fittings



STEEL FORK CASTOR "BRUTUS" W/HOLE FOR BOLT & RUBBER TRACK

Material: Wheel: Grey soft rubber.
Metal parts: Steel, bright zinc plated.

Application: Hole for bolt.
Recommended for hard surface.
With or without brake.



Fork castor without brake




Fork castor with brake




No brake




mm




mm



mm



static/dynamic
kg



mm

08.12.168

50

73

18

45/30

10,5

08.12.170

75

100

21

60/45

10,5

08.12.205

100

132

25

70/55


12,5




With brake




mm



mm



mm



static/dynamic
kg



mm

08.12.169

50

73

18

45/30

10,5

08.12.171

75

100

21

60/45

10,5

08.12.206

100

132

25

70/55


12,5

FORK CASTOR W/FIXED PLATE & RUBBER TRACK


STEEL FORK CASTOR W/FIXED PLATE & RUBBER TRACK

Material: Wheel: Grey soft rubber.
Metal parts: 1,5 mm steel, bright zinc plated.


Application: Premounted fixed top plate.
Recommended for hard surface.
Without brake.

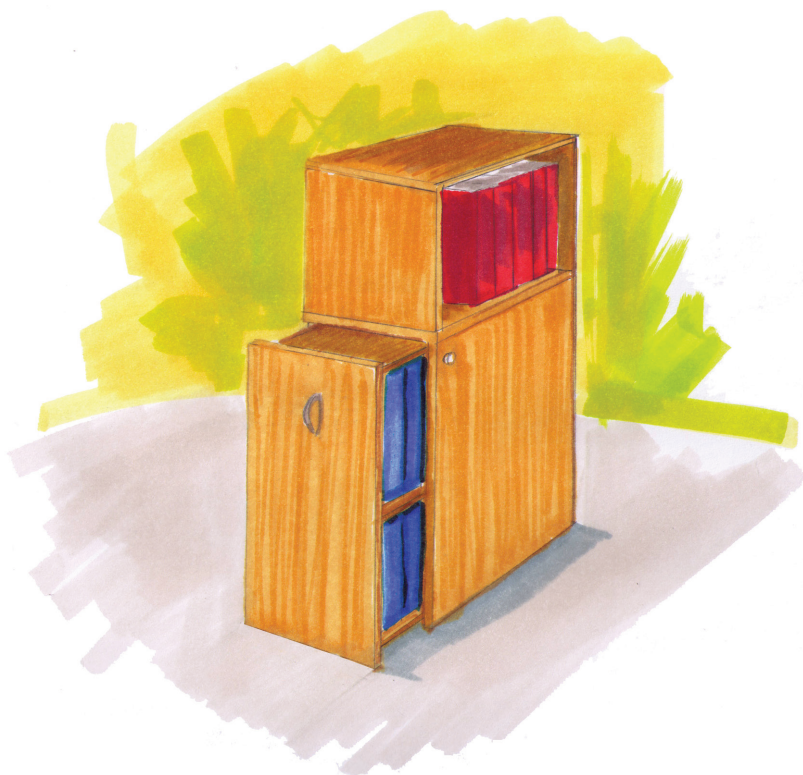


mm




mm




mm



static/dynamic
kg



mm



mm

08.12.150

50

73

20

45/30

30 x 30

45 x 45 x 1,5

Good advice in order to obtain optimum and correct use of your castors:

Diameter & hardness:

Castors with large diameter roll easily and absorb possible shocks.

Castors with wide treads (tracks) spread the load and provide good floor protection.




Castors with hard tread (track) offer higher load capacity and roll easily.

Castors with soft tread (track) provide a cushioned ride and a quiet operation.

What to use where?

Castors with hard tread (track) are ideal for industrial locations with rough floors and steel grates.

Castors with soft tread (track) protect the floor and offer a quiet operation – though, less suited for use on carpets.

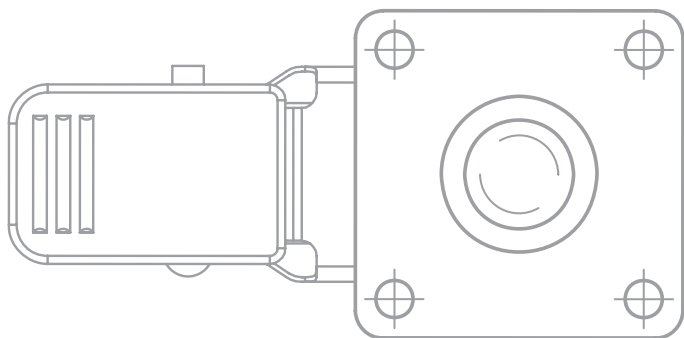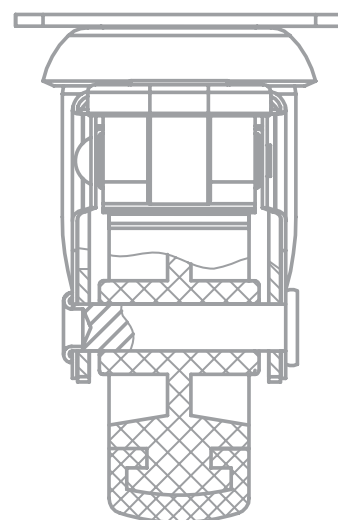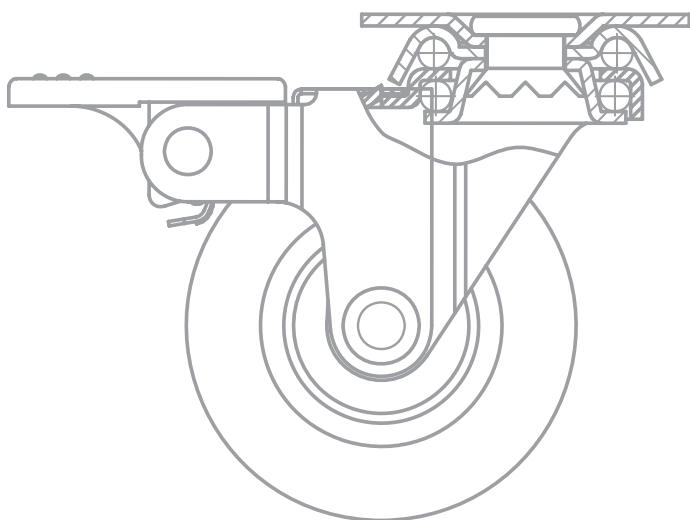

ALU LEGS "JACO" & "NIKO" W/TOP PLATE


ALU LEG "JACO" W/TOP PLATE




Material:	Tube:	Aluminium, silver sprayed
	Plug & spacer:	Plastic, black.
	Top plate:	2 mm steel, bright zinc plated.
Application:	With premounted top plate 39 x 39 and 42 x 42 mm.	




mm



mm



mm



mm

# 06.09.465	40	58	29 x 29	39 x 39 x 2
# 06.09.466	40	100	29 x 29	39 x 39 x 2
# 06.09.467	40	150	29 x 29	39 x 39 x 2
# 06.09.475	60	58	32 x 32	42 x 42 x 2
# 06.09.476	60	100	32 x 32	42 x 42 x 2


ALU LEG "NIKO" W/TOP PLATE




Material:	Tube:	Aluminium, silver sprayed, black or polished.
	Plug & spacer:	Plastic, black.
	Top plate:	2 mm steel, bright zinc pl.
Application:	With premounted top plate 39 x 39 and 42 x 42 mm.	




mm



mm



mm



mm

Silver sprayed	Black	Polished				
# 06.09.455	# 06.09.455-4		40 x 40	58	29 x 29	39 x 39 x 2
# 06.09.456	# 06.09.456-4		40 x 40	100	29 x 29	39 x 39 x 2
# 06.09.457	# 06.09.457-4		40 x 40	150	29 x 29	39 x 39 x 2
# 06.09.471			60 x 60	58	32 x 32	42 x 42 x 2
# 06.09.472		# 06.09.493	60 x 60	100	32 x 32	42 x 42 x 2
# 06.09.473			60 x 60	150	32 x 32	42 x 42 x 2


ALU LEG "TRIA" & STEEL LEG "SIRI"

- high quality furniture fittings


ALU LEG "TRIA" W/TOP PLATE

Material: Tube: Aluminium, silver sprayed.
 Plug & spacer: Plastic, black.
 Top plate: 2 mm steel, bright zinc plated.


Application: With premounted top plate 39 x 39 mm.




mm



mm



mm



mm



06.09.470 40 x 40 x 55 150 29 x 29 39 x 39 x 2


STEEL LEG "SIRI" W/ROUND TOP PL.

Material: Leg: Steel, Black Matt or SS-look
 Top plate: Steel, Black Matt or SS-look
 Base: Polypropylene (PP), black.


Application: With premounted top plate in Ø 60 x 2 mm.
 With Ø 5 mm screw holes
 With adjustable glide
 With 15 mm height regulation



FINISH




mm




mm



mm



mm



mm




#	FINISH	Ø Tube	Height	Ø Base	Ø Top pl.	Base
# 06.09.419	SS-look	35	100-115	50	Ø60 x 2	35 x 35
# 06.09.421	Black matt	35	100-115	50	Ø60 x 2	35 x 35
# 06.09.420	SS-look	35	150-165	50	Ø60 x 2	35 x 35
# 06.09.422	Black matt	35	150-165	50	Ø60 x 2	35 x 35

STEEL LEGS "ANNA" & "VERA"

STEEL LEG "ANNA" W/SQUARE TOP PL. & ROUND TUBE

Material: Leg: Steel, Black Matt or SS-look
Top plate: Steel, Black Matt or SS-look
Base: Polypropylene (PP), black.

Application: With premounted top plate in 60 x 60 x 1,5 mm.
With Ø 4 mm screw holes
With adjustable glide
With 10 mm height regulation

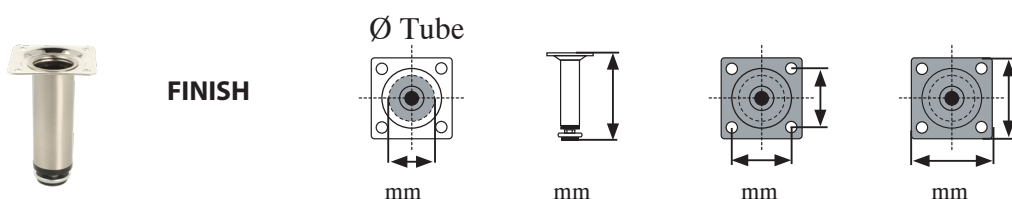


# 06.09.410	SS-look	30	100-110	44 x 44	60 x 60 x 1,5
# 06.09.412	Black matt	30	100-110	44 x 44	60 x 60 x 1,5
# 06.09.413	SS-look	30	150-160	44 x 44	60 x 60 x 1,5
# 06.09.414	Black matt	30	150-160	44 x 44	60 x 60 x 1,5

STEEL LEG "VERA" W/SQUARE TOP PL. & SQUARE TUBE

Material: Leg: Steel, Black Matt or SS-look
Top plate: Steel, Black Matt or SS-look
Base: Polypropylene (PP), black.


Application: With premounted top plate in 60 x 60 x 1,5 mm.
With Ø 4 mm screw holes
With adjustable glide
With 10 mm height regulation

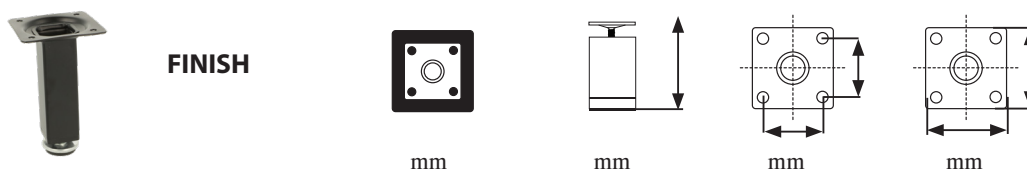

# 06.09.415	SS-look	25 x 25	100-110	44 x 44	60 x 60 x 1,5
# 06.09.416	Black matt	25 x 25	100-110	44 x 44	60 x 60 x 1,5
# 06.09.417	SS-look	25 x 25	150-160	44 x 44	60 x 60 x 1,5
# 06.09.418	Black matt	25 x 25	150-160	44 x 44	60 x 60 x 1,5


LEG BRACKET - FLAT

Material: Steel, Bright Zinc Plated
Size: 66 x 58 x 1,8 mm
Hole: M8
Item No.: # 06.11.151

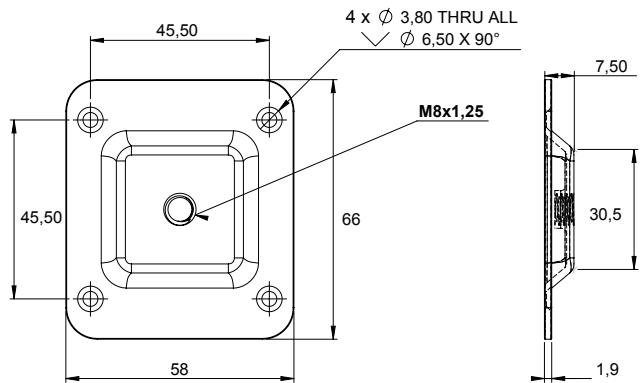



LEG BRACKET - 10 DEGREE ANGLE

Material: Steel, Bright Zinc Plated
Size: 66 x 58 x 1,8 mm
Hole: M8
Item No.: # 06.11.150

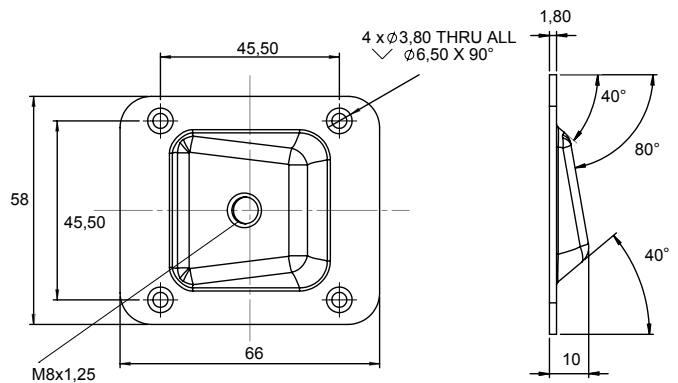

LEG BRACKET - 10 DG - W/HEX NUT

Material: Steel, Bright Zinc Plated
Size: 66 x 58 x 1,8 mm
Hole: M8
Item No.: # 06.11.152

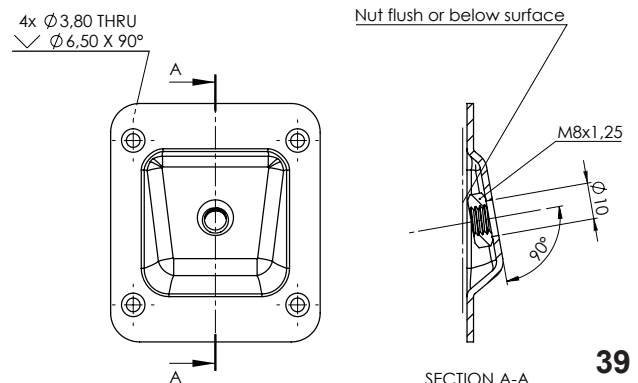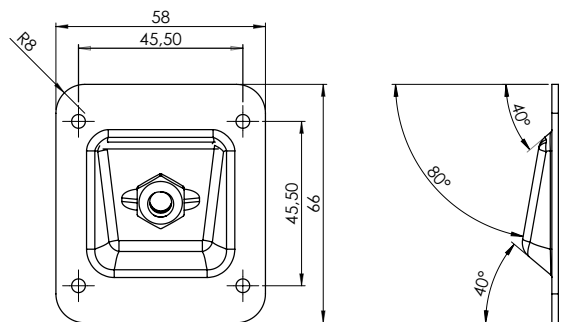

LEG CONNECTOR "WEKA"




- is ideal for any shape of leg with an M8 thread
- is made of zamak & steel
- is made for min. 18mm panel thickness
- gives you the possibility to tighten and adjust your leg in any position
- pulls and holds the leg into place
- is perfect for knock-down furniture
- is made for flush or elevated installation
- is tested and certified according to EN 15372

PATENTED

LEG CONNECTOR "WEKA"

Material: Zamak body & steel nut
Size: Ø 60 x 17,5 mm
Screw holes: Ø6 mm
Item No.: 06.11.220


Screws and bolts to be bought separately

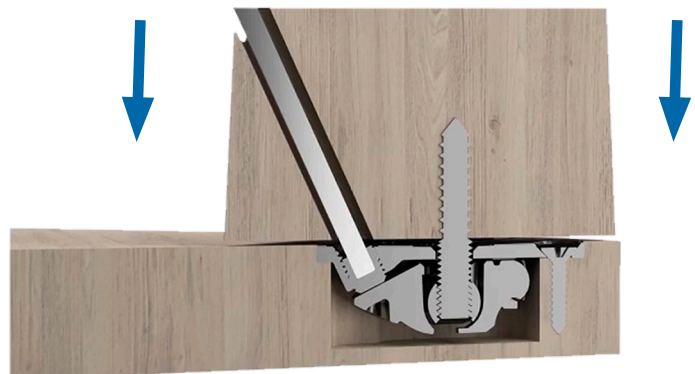

Tighten the set screw. The internal wedge system pulls and holds the leg into place

LEG CONNECTOR "WEKA"

- high quality furniture fittings

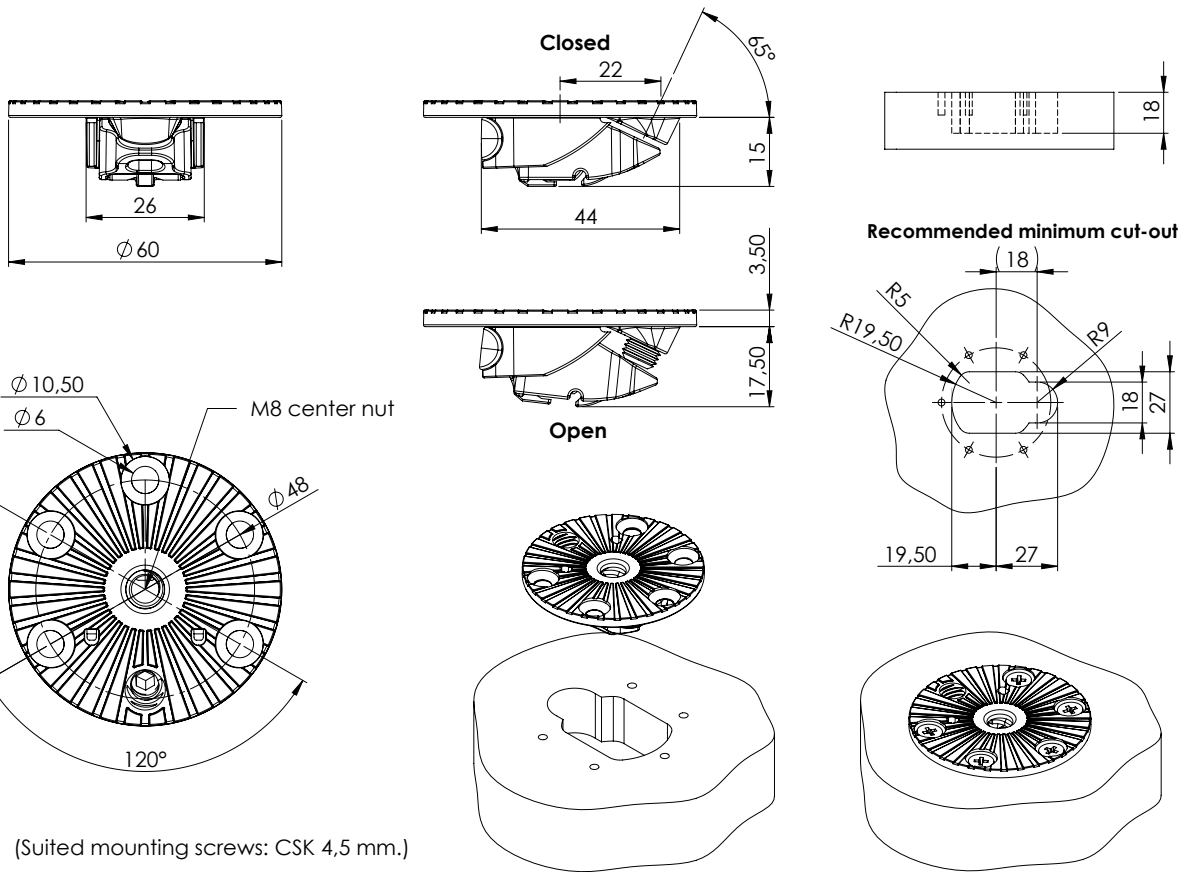

LEG CONNECTOR "X-TREME"



Leg Connector "X-treme"
with internal tightening system for perfect positioning of the leg

- is ideal for any shape of leg with an M10 thread
- is made of stainless steel & aluminum.
- is made for min. 25 mm panel thickness
- gives you the possibility to tighten and adjust your leg in any position
- pulls and holds the leg into place
- is perfect for heavy duty knock-down furniture
- is made for flush or elevated installation
- is tested and certified




Leg Connector "X-treme"

Material: Stainless steel & aluminum
Size: 100 x 100 mm
Screw holes: Ø5,5 mm
Item No.: 06.11.230

Screws and bolts to be bought seperately



- high quality furniture fittings

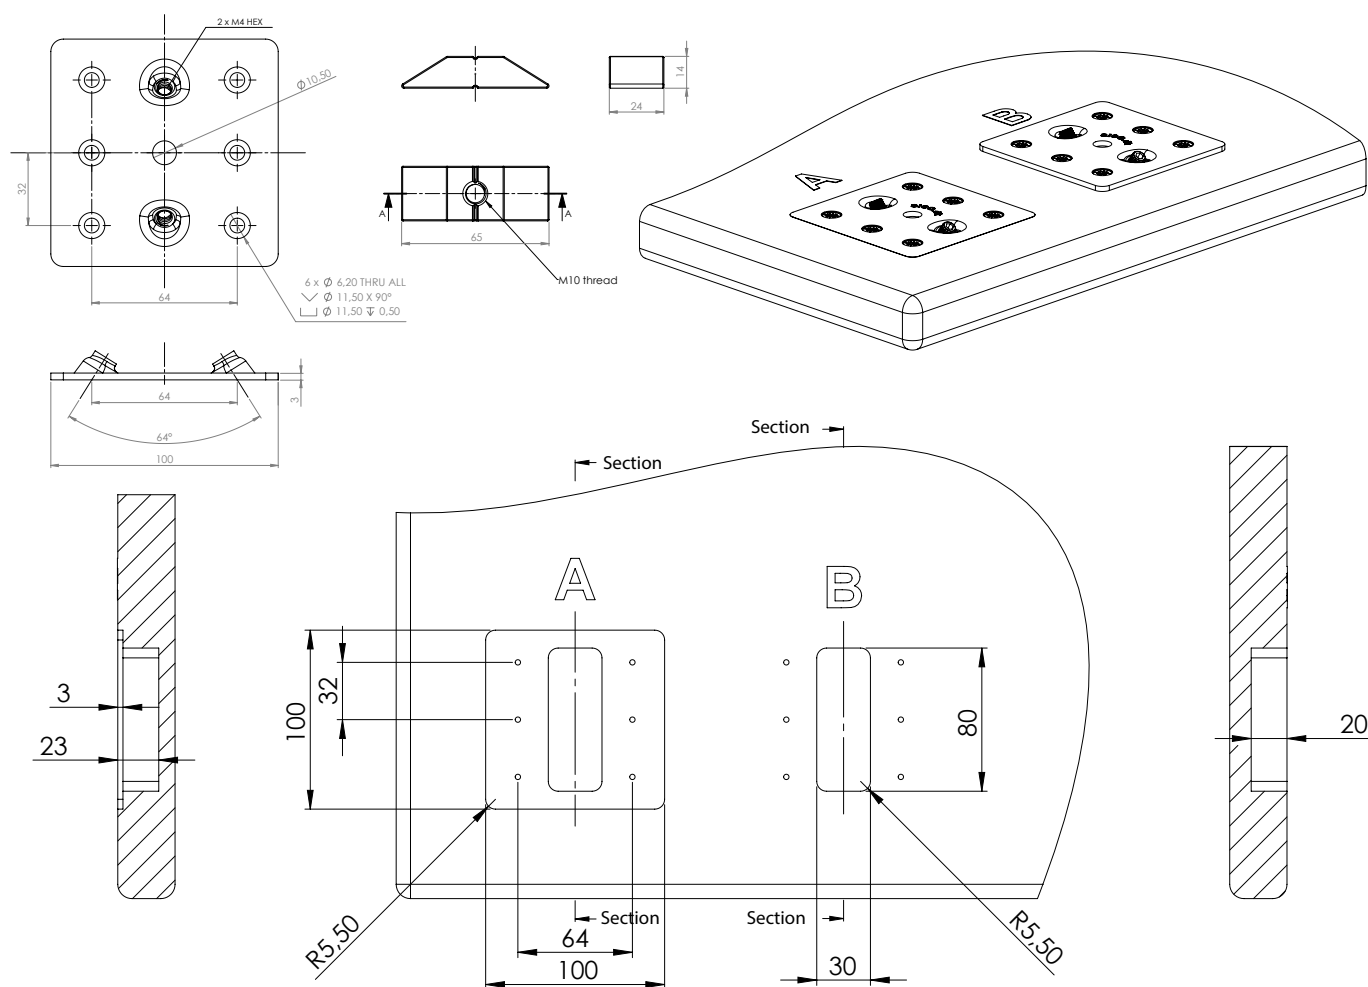

LEG CONNECTOR "CONAN"



ANGLE ADJUSTMENT LEG CONNECTOR "CONAN"

Intelligent self-adjusting stainless steel leg connector bracket. Ideal for any kind of furniture with slanted legs. Due to its rocking stainless steel nuts the bracket may be used from 0 – 25 degrees. Fixed to the leg by 2 special wood screws.



LEG CONNECTOR "CONAN"


Material: SS-304
Size: 80 x 110 x 15 mm (W/L/H)
Screw holes: Ø 6,5 mm

Item No.:
Black # 06.11.210
Raw # 06.11.211

Packing: 1 pce. per inner box.

Wood screws to be bought separately.
(Must be used for perfect function)

PATENTED

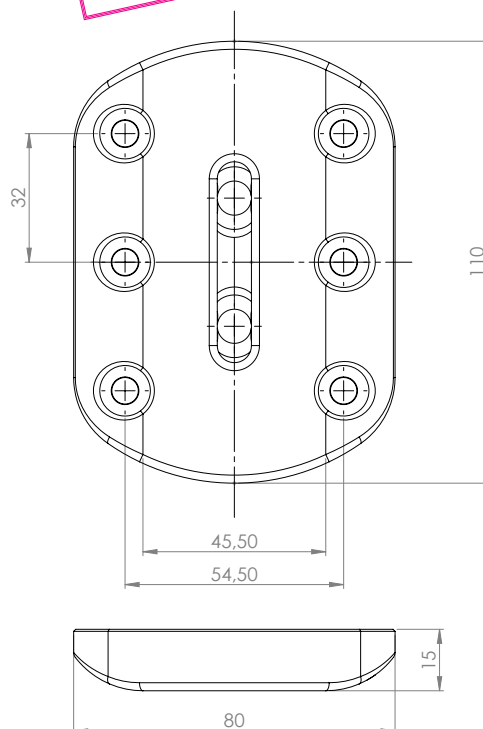

LEG CONNECTOR "CONAN"

- high quality furniture fittings



1. Drill two holes straight into the leg
(Recommended hole size $\varnothing 7 \times 70$ mm)




2. Cut the top of the leg into the desired angle



3. Fix the bracket to the leg with the 2 special wood screws



4. The nuts adjust themselves to the angle of the leg

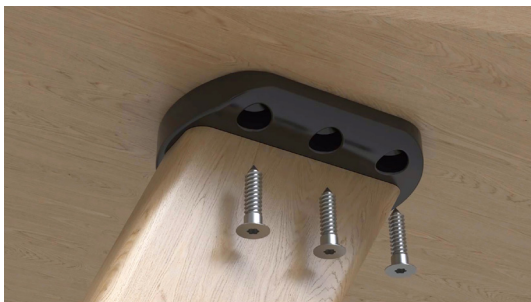

5. Fix the bracket to your furniture





WOOD SCREW

Material: SS-304
Size: $\varnothing 7 \times 80$ mm, Torx 30

Item No.: # 06.11.215

(2 pcs pr. bracket)

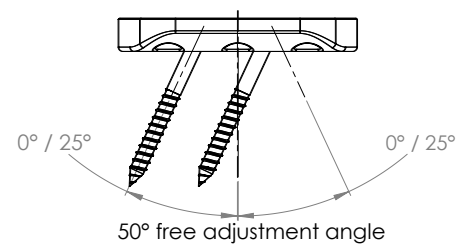

"TWISTER" - THE LEG CONNECTOR



"TWISTER" - LEG CONNECTOR

The "Twister" leg connector is designed for installing a leg in any position from 0 – 20 degrees – one way, simply by twisting the leg tightly onto the connector plate.

May be used on tables, cabinets, beds, sofas ect. wherever a leg is needed.

"Twister" gives the possibility to change the design on the furniture whenever there is a demand. Furthermore it may be used as a height adjuster/leveller in case of uneven floors.

Adjustable up to 40mm when changing the angle from 0 – 20 degrees. "Twister" is designed for maximum leg diameter of 50mm and M8 bolt.

The round sliding plate and body are made of black reinforced ABS.

The internal part is made of steel.

Danish design by SISO & Jesper Møller Hansen.

Pat. Pending in EU & US.

Wood top mounting



(Leg: customer provided)

**Glass top mounting
w/aluminium disc & UV-glue**

(Leg: customer provided)



"TWISTER" - THE LEG CONNECTOR

- high quality furniture fittings

WOOD TOP MOUNTING

Material: Reinforced ABS & steel


Total size: Ø 106,5 x 27 mm

Screw holes: Ø 5,5 mm



Item No.: 06.11.100

Packing: 1 pce pr. inner box

Screws and hangerbolt to be bought separately.

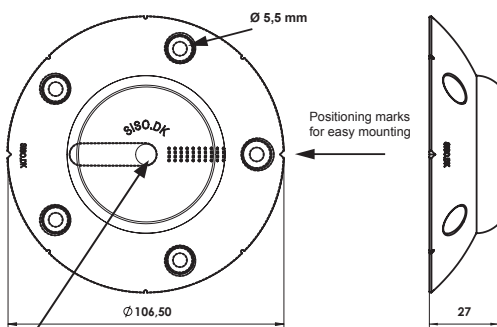

M8 thread

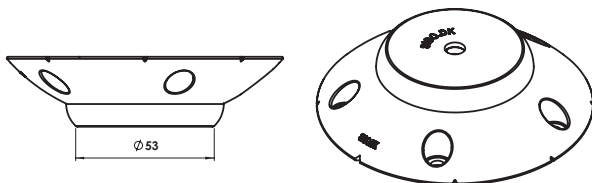


A



B



C



D



E

GLASS TOP MOUNTING W/ALUMINIUM DISC & UV-GLUE

For glass top mounting by use of Twister connector combined with an aluminum disc.


Material: Aluminium

Size: Ø 108 x 10 mm,
For screws M5 x 8mm

Item No.: # 06.11.121

Fixing screws and Twister connector to be ordered separately.

The aluminium disc is glued to the glass by use of Bohle UV-Glue B 682-0. UV-lamp is needed.

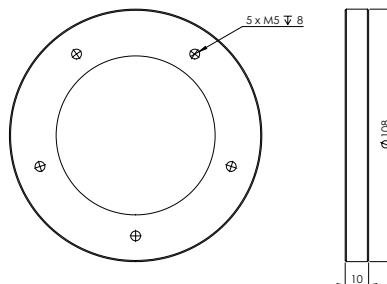

"MINI TWISTER" - THE LEG CONNECTOR

Ideal for chairs, beds, sofas and coffee tables.

Material: SS304

Total size: Ø 85 x 24 mm

Screw holes: Ø 5,5 mm

Item No.: 06.11.200, Black
06.11.201, Raw

Packing: 1 pce. per inner box

Screws and hangerbolt to be bought separately.



Stainless steel 304,
Black




Stainless steel 304,
RAW




(Leg: customer provided)



PATENTED



M8 thread

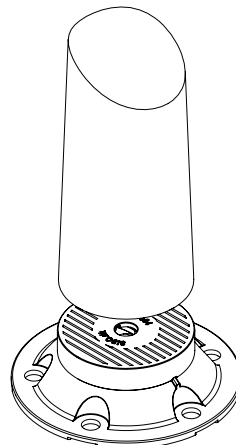


A

B



C

D



Preset positioning spots to insure correct adjustment and strength

- 0°
- 6,50°
- 13,50°
- 20°

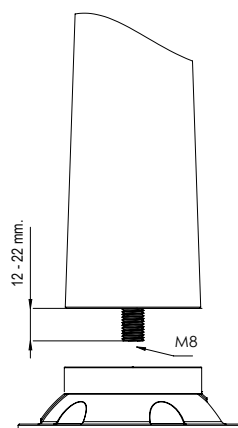

X = 0°, 6.5°, 13.5°, 20°

"TWIST 'N TURN" - THE LEG CONNECTOR

- high quality furniture fittings

"TWIST 'N TURN" - THE LEG CONNECTOR

Ideal for tables, cabinets, beds, sofas, coffee tables ect.

Feature: Adjustable in 5 steps from 0 to 15 degrees

Material: PA6 – re-inforced with glass fibre

Size: Ø 79,5 x 20 mm

Screw holes: Ø 6,2 mm


Item No.: # 06.11.130 - M10 Bushing
06.11.135 - M8 Bushing

Packing: 1 pce. per inner box


Screws and hangerbolt to be bought separately




0 degrees




5,5 degrees





10,5 degrees



13,5 degrees





15 degrees

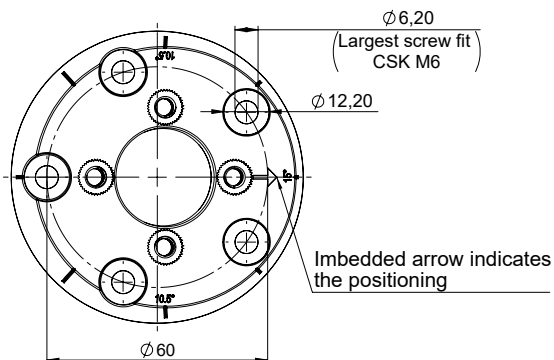

PATENTED

The 4 illustrated screws are included.
Used to set the desired bracket angle
before installing the leg

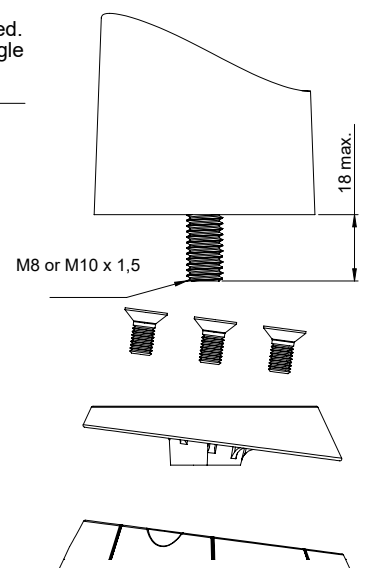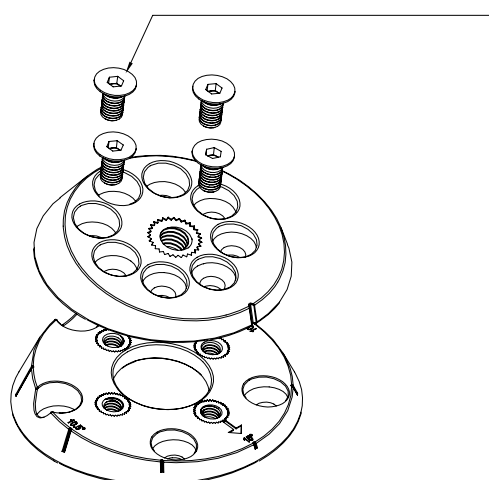

"RIMA" LEG CONNECTOR F/SQUARE LEGS

The "RIMA" leg connector gives you the possibility to tighten and adjust your leg in any position due to its patented internal spring-loaded system.

With a traditional bushing you normally reach a point where you cannot turn in the hangerbolt any further. If you then have a square leg that has to be flush with the edge of the furniture you have a problem. Only by heavy force you can try to turn your leg further and risk that the wood cracks.






This will not happen with the "RIMA" connector due to its patented internal spring-loaded system.



PATENTED

"RIMA" LEG CONNECTOR

Application:	F/Square Legs W/Spring Tension
Material:	Black PC/ABS
Size:	81,5 x 20,5 mm
Max. Leg size:	70 x 70 mm , F/M10 bolt
Panel thickness:	From 10 mm
Item No.:	# 06.11.140

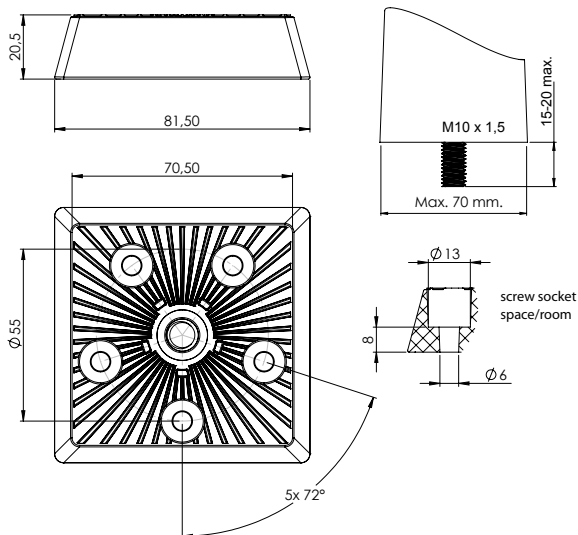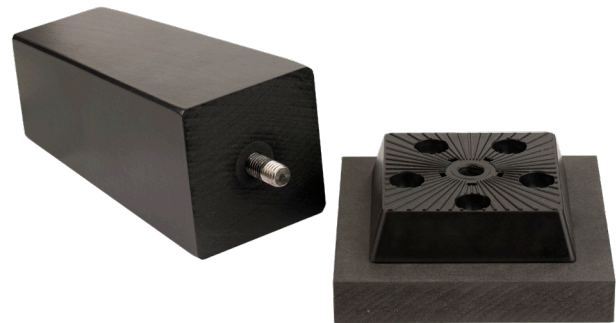

Tighten and adjust the leg to correct position without cracking the wood

ANGLE WEDGE F/ "RIMA" LEG CONNECTOR



- high quality furniture fittings

ANGLE WEDGE FOR "RIMA" LEG CONNECTOR

Feature:	Adjustable in 3 steps from 0 to 10 degrees.
Material:	Black PC/ABS
Size:	81,5 x 20,5 mm, 5° angle
Item No.:	# 06.11.145




PATENTED

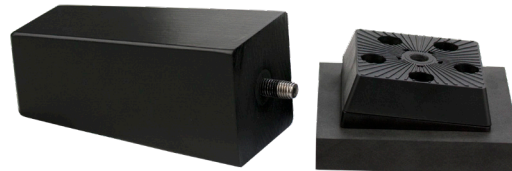


How to change the angle and direction




5° angle by use of one wedge



10° angle by use of two wedges



7° angle and change of direction by use of two wedges



"CURLY" MULTIFUNCTIONAL FOLDING LEG BRACKET

The folding leg connector "Curly" gives you the possibility of transforming your dining table into a coffee table, simply by pushing the activator button and folding the legs. Ideal for apartments with limited space.

May be used on classic folding tables as well. Ideal for hotels, cafés, restaurants, public halls, banks, bars & meeting rooms.

Has been tested at Danish Technological Institute according to EN 15372:2016 - Level 2.



Danish design by SISO A/S.



PATENTED




"CURLY" MULTIFUNCTIONAL LEG BRACKET

Material:	Black PC/ABS
Size:	Ø115 x 85 mm
Max leg diam.:	Ø60 mm, F/M10 bolt
Item No.:	# 06.11.050

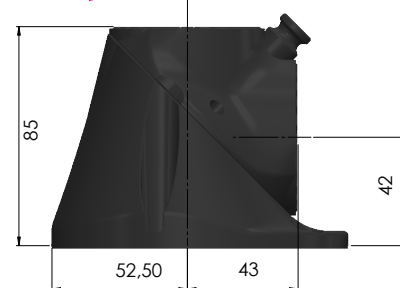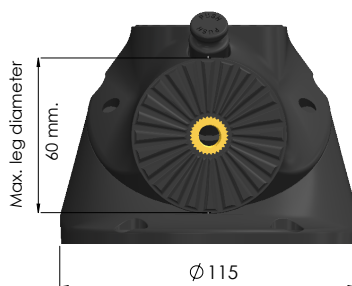

M10 x 1,5 mm. thread
(Max. inserted thread length 20 mm.)

Activation push button

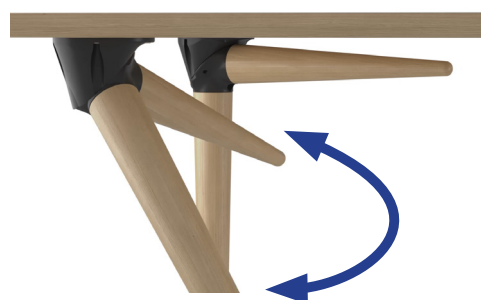

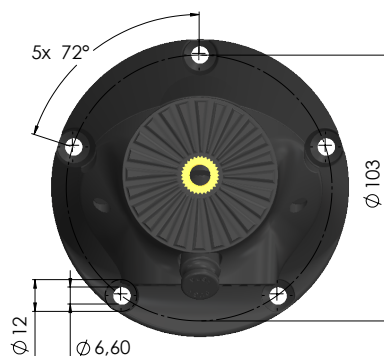


STACKING BUMPER FOR "CURLY"

- high quality furniture fittings

STACKING BUMPER F/ "CURLY"

Material:	Black EPDM
Size:	Ø56 x 10,5 mm
Thread:	M10 x 14 mm
Item No.:	# 06.11.055

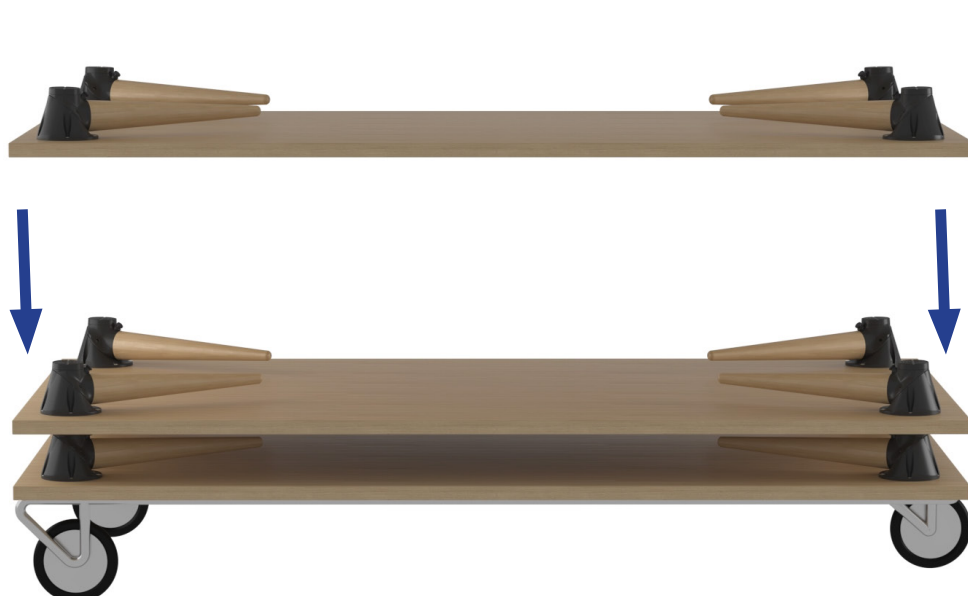

ADJUSTABLE GLIDES


ADJUSTABLE GLIDE "ALPHA"

Material: Base: Polyamid (PA), black.
Stud: Steel, bright zinc plated.

Application: W/Knurlled edge on base.



Item - number	Finish	D diameter	H height	M size	S stud
10.16.006	Black	Ø15	6 mm	6	22 mm
10.16.011	Black	Ø20	6 mm	6	22 mm
10.16.016	Black	Ø20	6 mm	6	37 mm
10.16.025	Black	Ø25	6 mm	6	22 mm
10.16.027	Black	Ø25	6 mm	8	22 mm
10.16.035	Black	Ø32	8 mm	8	22 mm
10.16.040	Black	Ø38	9 mm	8	26 mm
10.16.046	Black	Ø44	10 mm	8	26 mm
10.16.120	Black	Ø60	10 mm	10	34 mm

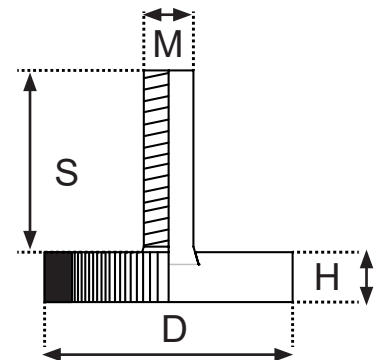


ADJUSTABLE GLIDE "MAU"

Material: Base: Polypropylene (PP), black.
Shell: Steel, zinc plated.
Stud: Steel, bright zinc plated.

Application: W/Knurlled edge on base.




Item - number	Finish	D diameter	H height	M size	S stud
#10.16.210	Black/ZP	Ø20	7 mm	6	20 mm
#10.16.214	Black/ZP	Ø28	8 mm	8	22 mm
#10.16.215	Black/ZP	Ø28	8 mm	8	38 mm
#10.16.230	Black/ZP	Ø32	9 mm	10	25 mm

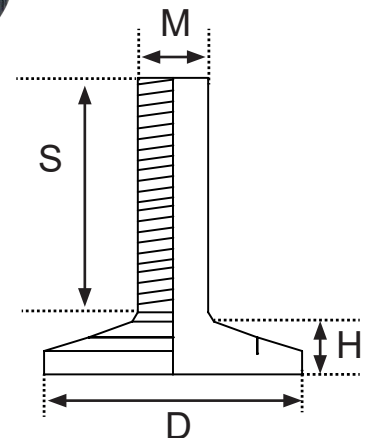

ADJUSTABLE GLIDE "OCTO"

Material: Base: Polyamid (PA), black.
Stud: Steel, bright zinc plated.

Application: W/ Square hole 6x6 mm in bottom of base & 4 mm hex hole in top of the stud for quick fixing.

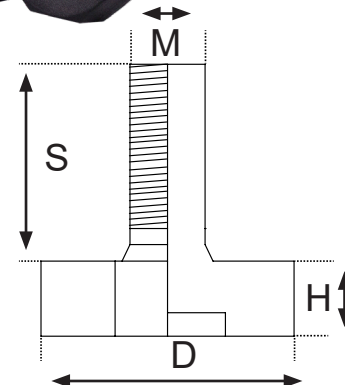



Item - number	Finish	D diameter	H height	M size	S stud
# 10.17.135*	Black	27	8 mm	8	21 mm
# 10.17.140	Black	27	9 mm	10	35 mm

*NO HEX HOLE IN THE TOP OF STUD

ADJUSTABLE GLIDE "BETA"

Material: Base: Polyamid (PA), black.
Stud: Steel, bright zinc plated.

Application: W/Slot in bottom of base for quick fixing.

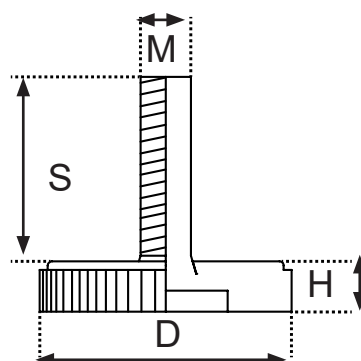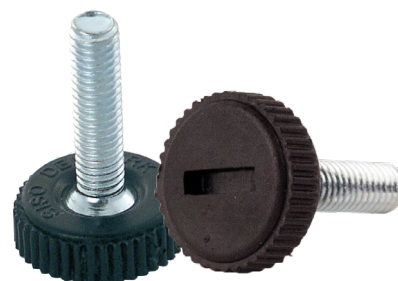


Item - number	Finish	D diameter	H height	M size	S stud
#10.17.047	Black	Ø20	7 mm	6	6 mm
#10.17.053	Black	Ø20	7 mm	6	22 mm

ADJUSTABLE GLIDE "JACK"

Material: Base: Polypropylene (PP), black.
Stud: Steel, bright zinc plated.

Application: W/Plastic hex nut for easy height adjustment & with pozidriv in bottom of base & in top of the stud for quick fixing.

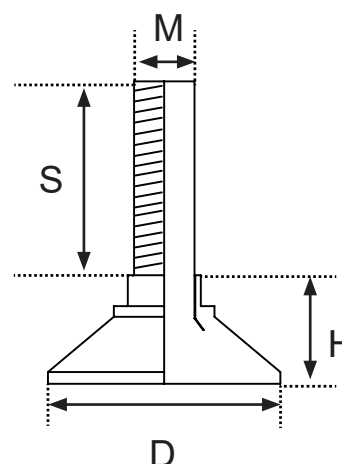

Item - number	Finish	D diameter	H height	M size	S stud
# 10.15.050	Black	Ø25	15 mm	8	25 mm

ADJUSTABLE GLIDES

ADJUSTABLE GLIDE "ARC"

Material: Base: Polyamid (PA), black.
Cover shell: Steel, chrome plated.
Stud: Steel, bright zinc plated.

Application: W/Pozidriv in bottom of base for quick fixing.




10.12.400



10.12.420

Item - number	Finish	D diameter	H height	M size	S stud
# 10.12.400	Black/CPL	Ø30	12,75 mm	8	20 mm
# 10.12.420	Black/CPL	Ø50	12,75 mm	10	20 mm

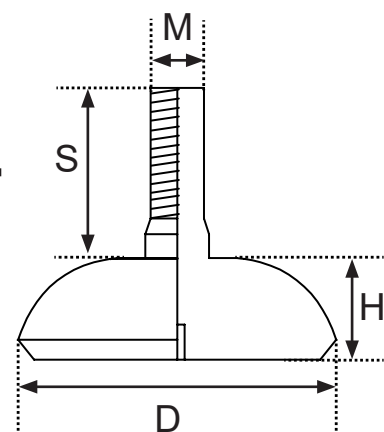


ADJUSTABLE GLIDE "TITAN"

Material: Base: Polypropylene (PP), white.
Shell: Steel, chrome.
Stud: Steel, bright zinc plated.

Application: W/Hex nut for easy height adjustment




Item - number	Finish	D diameter	H height	M size	S stud
#10.12.076	White/CPL	Ø26	10 mm	8	25 mm
#10.12.095	White/CPL	Ø43	13 mm	8	25 mm

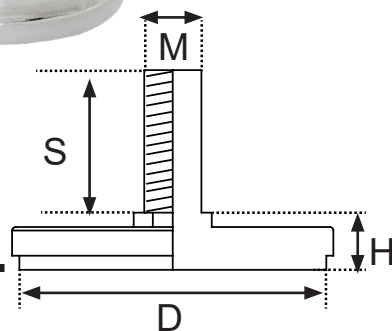

ADJUSTABLE GLIDE “STRATO”

Material: Base: Polypropylene (PP), black.
Cover shell: Steel, chrome plated.
Stud: Steel, bright zinc plated.

Application: W/Hex nut for easy height adjustment.
Swivel stud for smooth leveling.

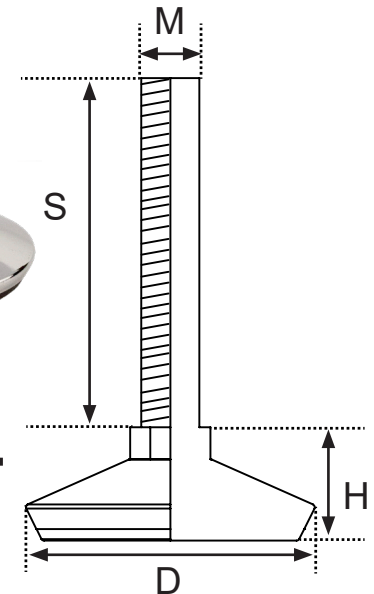


Item - number	Finish	D diameter	H height	M size	S stud
# 10.12.300	Black/CPL	Ø50	20	10	60 mm

ADJUSTABLE GLIDE “TIME”

Material: Base: Polypropylene (PP), black.
Stud: Steel, bright zinc plated.

Application: W/Hex nut for easy height adjustment
and M4 hex hole in top of the stud for
quick fixing.
Swivel stud for smooth leveling.

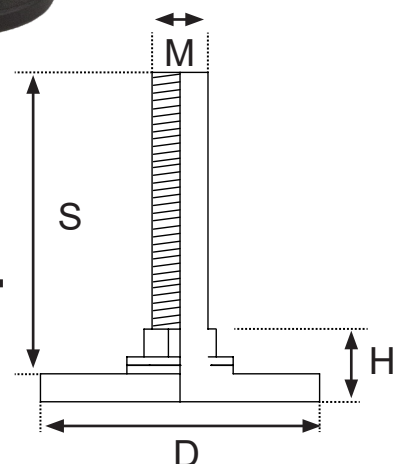

Item - number	Finish	D diameter	H height	M size	S stud
# 10.13.510	Black	Ø50	14 mm	10	34 mm
# 10.13.520	Black	Ø50	14 mm	10	98 mm

ADJUSTABLE GLIDES


ADJUSTABLE GLIDE “NORFOLK”

Material: Base: Steel, nickel plated.
Stud: Steel, bright zinc plated.
Cushion: Black rubber.

Application: W/Rubber silencer cushion for quiet working environment.



Item - number	Finish	D diameter	H height	M size	S stud
#10.21.290	Black/NPL	Ø23	10 mm	8	25 mm

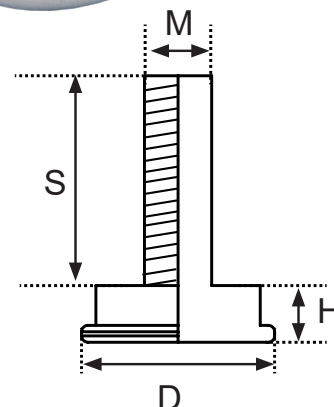

ADJUSTABLE GLIDE “CONWAY”


Material: Base: Polypropylene (PP), black.
Stud: Steel, bright zinc plated.

Application: W/Hex nut for easy height adjustment.
Oscillating stud for angle adjustment.



Item - number	Finish	D diameter	H height	M size	S stud
#10.08.026*	Black	Ø26	21 mm	8	25 mm
#10.08.131	Black	Ø30	21 mm	8	25 mm
#10.08.161	Black	Ø44	21 mm	10	34 mm

* NO HEX NUT

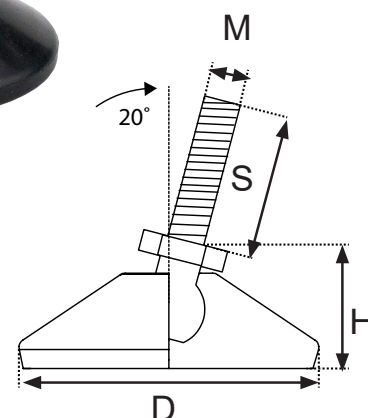


ADJUSTABLE GLIDE “COMO”

Material: Base: Steel, bright zinc plated.
Cover: Transparent polyethylene (PE).
Stud: Steel, bright zinc plated.

Application: W/Slot in top of stud for quick fixing.
Swivel stud for smooth leveling.



Item - number	Finish	D diameter	H height	M size	S stud
#10.16.250	BZP	Ø33	6 mm	8	64 mm
#10.16.270	BZP	Ø33	6 mm	10	94 mm

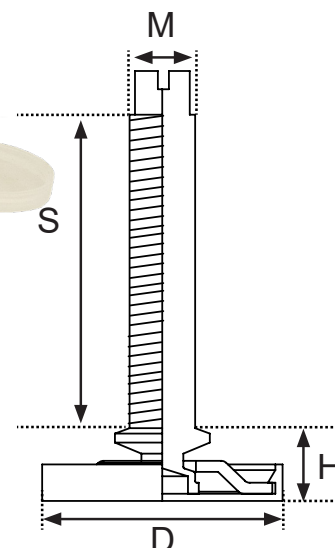

JUMBO GLIDES W/TOP PLATE

Material: Body: Polyamid (PA), black matt.
Base: Polyamid (PA), black.

Application: With top plate 38 x 38 mm and 42 x 42 mm.



7373



7373

MODEL

FINISH


Ø Base




Ø



mm



mm



mm

09.01.068-4

7373

Black

73

57

26 x 26

38 x 38 x 1,5


CUP LEVELLER W/ADJUSTABLE GLIDE

Material: Polyamid (PA), black.

Application: Knock in mounting. Ø10 mm bore.
Adjustable glide w/M4 hex hole.




Ø Cup




mm

Ø Glide




mm



mm

Ø Bore x H



mm H= height

10.16.410

50

25

27 to 36

10 x 13

10.16.415

50

25


43 to 53

10 x 13

MORTISE LEVELLER

Material: Polyamid (PA), black.

Application: Knock in mounting. Ø10 mm bore.
Adjustable glide w/M8 hex hole.

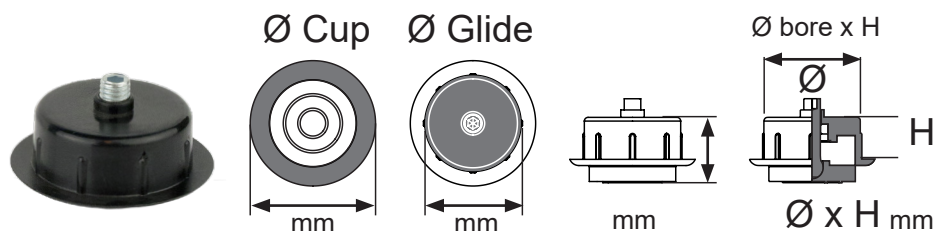

10.16.295

51

35


18 to 24

40 x 15


ADJUSTABLE CORNER BRACKET "ANGOLO"

Material:	Glide:	Steel, bright zinc plated.
	Bracket:	Steel, bright zinc plated.
	Cover cap:	Polyethylene (PE), white.

Application: W/4 mm hex hole in top of stud for quick fixing.
Swivel stud for smooth leveling.
W/Cover cap for floor protection.
Left or right hand model.

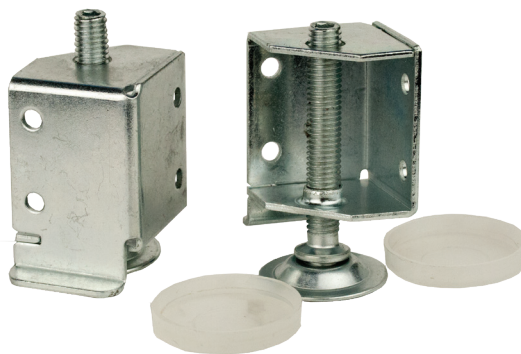



Item - number	Site L or R	D glide	H height	M size	S stud
# 10.16.510	Right	Ø32,5 x 1	1 mm	8	60 mm
# 10.16.511	Left	Ø32,5 x 1	1 mm	8	60 mm

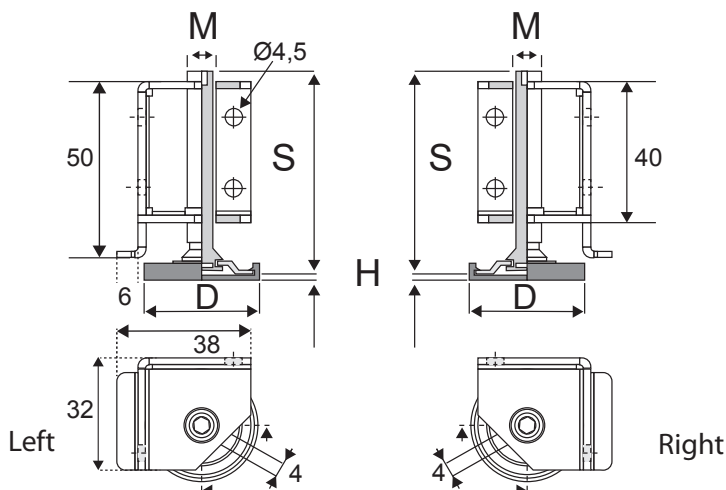

CONCEALED ADJUSTER


Material: Base: Polyamid (PA), black.
Stud: Steel, bright zinc plated.
Bracket: Zamak, natural.

Application: W/4mm hex hole in top of stud for quick fixing.
Oscillating stud for angle adjustment.
For panel thickness 18 - 30mm.
W/fixing pin Ø5 x 9mm.

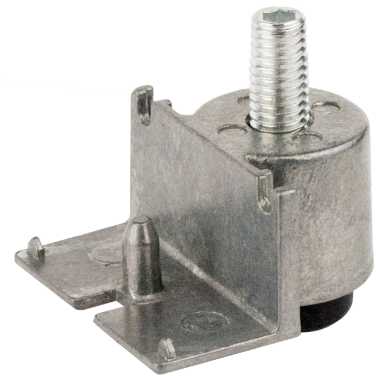

Item - number	G glide	T tread	S stud
---------------	------------	------------	-----------

#10.16.340	Ø20 x 9 mm	8	32 mm
------------	------------	---	-------

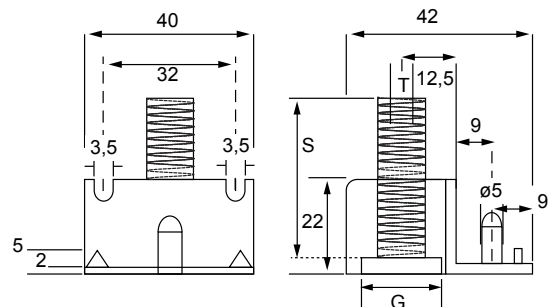

PLASTIC PANEL SHOE W/ADJUSTER


Material: Glide base: Polyamid (PA), black.
Stud: Steel, bright zinc plated.
Shoe body: Polyamid (PA), black.

Application: W/Knurled edge on base for smooth fixing.
F/panel thickness 18, 25 & 28 mm.
F/mounting on panel end only.



Item - number	Panel thickness	D glide	M size	S stud
---------------	-----------------	------------	-----------	-----------



#10.16.345	18 mm	Ø24 x 8 mm	6	22 mm
#10.16.350	25 mm	Ø31 x 8 mm	8	22 mm
#10.16.360	28 mm	Ø31 x 8 mm	8	22 mm

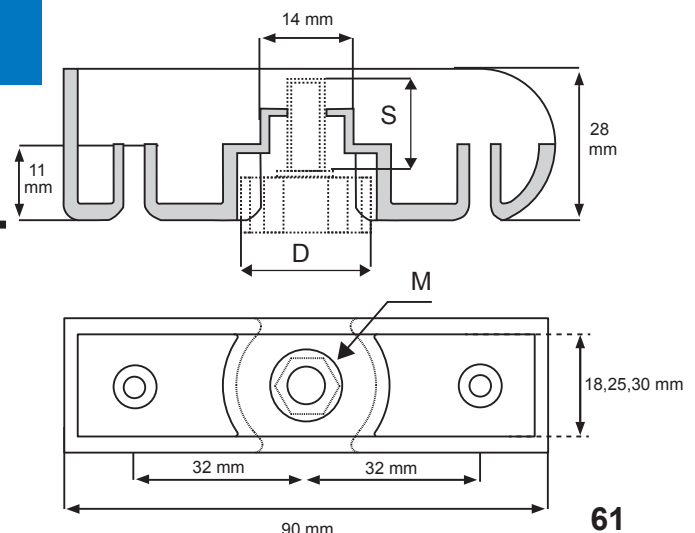

PLASTIC TACK, NAIL-ON GLIDE

Material: Base: Polyethylene, (PE), brown or white.
Nail: Steel, zinc plated.

Application: Nail-on glide with Ø2 x 18 mm nail.

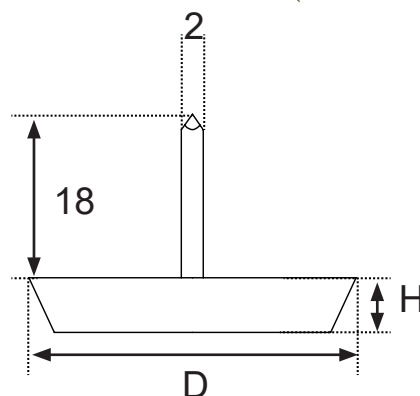


Item - number	Finish	D diameter	H height
#10.25.018	White	Ø13 mm	6 mm
#10.25.020	White	Ø15 mm	6 mm
#10.25.021	Brown	Ø15,5 mm	6 mm
#10.25.030	White	Ø18 mm	6 mm
#10.25.031	Brown	Ø18 mm	6 mm
#10.25.050	White	Ø22 mm	6 mm
#10.25.058	Brown	Ø28 mm	6 mm

PLASTIC TACK W/FELT, NAIL-ON GLIDE

Material: Base: Polyethylene, (PE), brown or white.
Nail: Steel, zinc plated.
Felt: Grey.

Application: Nail-on glide with Ø1,6 x 13 mm nail.

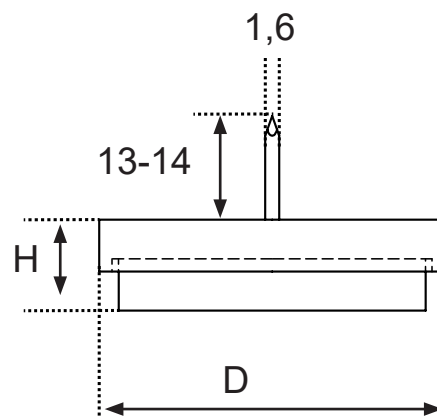


Item - number	Finish	D diameter	H height	Felt - thickness
# 10.25.078	White	Ø15	8 mm	4 mm
# 10.25.079	Brown	Ø15	8 mm	4 mm
# 10.25.082	White	Ø18	8 mm	4 mm
# 10.25.083	Brown	Ø18	8 mm	4 mm
# 10.25.086	White	Ø22	8 mm	4 mm
# 10.25.087	Brown	Ø22	8 mm	4 mm
# 10.25.090	White	Ø28	8 mm	4 mm
# 10.25.091	Brown	Ø28	8 mm	4 mm

PLASTIC TACK W/FELT, SCREW-ON GLIDE

Material: Base: Polystyrol, (PS), white.
Stud: Steel, zinc plated.
Felt: Grey.

Application: Screw-on glide with Ø3,5 x 20 mm pozidriv screw.

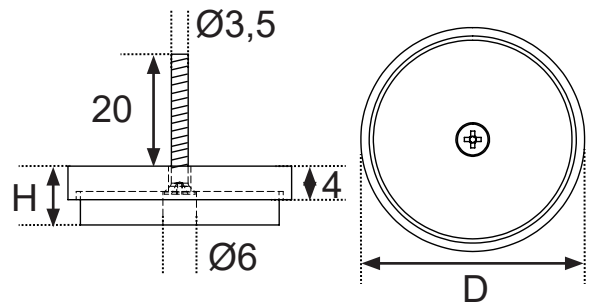


Item - number	Finish	D diameter	H height	Felt - thickness
# 10.25.100	White	Ø20	8 mm	4 mm
# 10.25.105	White	Ø24	8 mm	4 mm
# 10.25.110	White	Ø28	8 mm	4 mm
# 10.25.115	White	Ø40	8 mm	4 mm

STEEL TACK, NAIL-ON GLIDE

Material: Base: Steel, nickel plated.
Nail: Steel, zinc plated.

Application: Nail-on glide with nail.

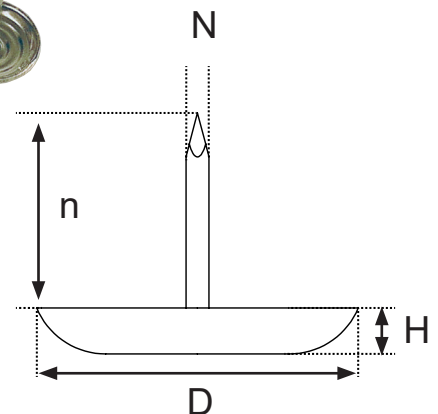


Item - number	Finish	D diameter	H height	N _{ail} diameter	n _{ail} length
# 10.22.110	NPL	Ø30	5 mm	Ø2 mm	20 mm

NAIL-ON GLIDE "NORFOLK"

Material: Base: Steel, nickel plated.
Nail: Steel, zinc plated.
Cushion: Black rubber.

Application: W/Rubber silencer cushion for quiet working environment.
Nail-on glide with flexible nail for angled chair legs.

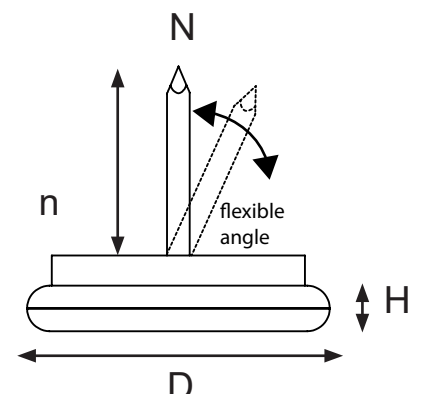


Item - number	Finish	D diameter	H height	N _{ail} diameter	n _{ail} length
# 10.21.010	NPL	Ø18	9 mm	2,4 mm	14 mm
# 10.21.020	NPL	Ø20	9 mm	2,4 mm	14 mm
# 10.21.030	NPL	Ø23	10 mm	2,4 mm	15 mm
# 10.21.040	NPL	Ø26	10 mm	2,4 mm	15 mm
# 10.21.050	NPL	Ø30	10 mm	2,4 mm	15 mm
# 10.21.060	NPL	Ø40	10 mm	3 mm	26 mm

STEEL GLIDE, W/3 PRONGS - KNOCK-IN

Material: Base: Steel, nickel plated.

Application: Knock-in glide with 3 prongs.

Item - number	Finish	D diameter	H height
# 10.23.020	NPL	Ø13	3,6 mm
# 10.23.030	NPL	Ø15	3,8 mm

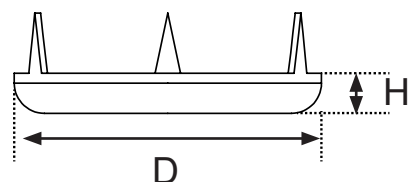


"TEFLON", SCREW-ON GLIDES

Material: Base: Grey PFFT

Screw: Steel, Yellow zinc plated

Application: Screw-on glide with Ø 4 x 20 mm posidrive screw

Item - number	Finish	D diameter	H height
# 10.25.500	Grey	Ø 19	7 mm
# 10.25.501	Grey	Ø 22	7 mm
# 10.25.502	Grey	Ø 25	7 mm
# 10.25.503	Grey	Ø 30	7 mm

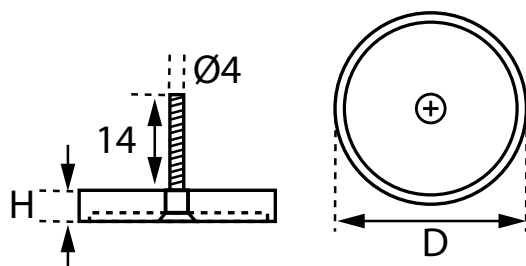


TUBE RIVET PLASTIC GLIDE - KNOCK-IN

Material: Base: Polyethylene, (PE), white.
Rivet: Steel, zinc plated.

Application: Knock-in glide with Ø9 x 4 mm steel rivet.




Item - number	Finish	A diameter	B height	C height	D diameter
# 10.50.160	White/ZPL	Ø20	5,5 mm	4 mm	Ø9

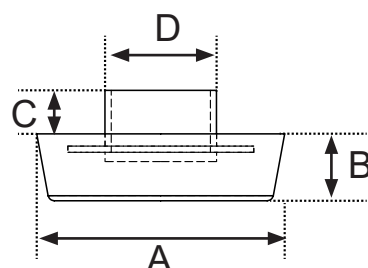

FELT PADS – SELF ADHESIVE

- Material:** Nonwoven fabric based on synthetic fibers, impregnated with synthetic resin in watery dispersion in order to make it solid & durable, combined with a high quality hot-melt adhesive. Available in black, white & brown.
- Application:** Self adhesive in round or square shape. To be used to avoid scratches on the floor.
- Tip:** Avoid using the felt pad for at least 24 hours after mounting to guarantee maximum adhesion.

Item - number	Color	A diameter	B height
#10.50.005	Black	Ø10 mm	1,5mm
#10.50.010	Brown	Ø16 mm	3,5 mm
#10.50.021	Brown	Ø20 mm	3,5 mm
#10.50.030	White	Ø20 mm	3,5 mm
#10.50.031	Black	Ø20 mm	3,5 mm
#10.50.035	Brown	Ø22 mm	3,5 mm
#10.50.040	Brown	Ø28 mm	3,5 mm
#10.50.041	White	Ø28 mm	3,5 mm
#10.50.060	Brown	Ø38 mm	3,5 mm
#10.50.061	Black	Ø38 mm	3,5 mm
#10.50.062	Black	Ø40 mm	3,5 mm
#10.50.073	Black	Ø55 mm	3,5 mm
#10.50.079	Black	Ø80 mm	3,5 mm
#10.50.088	Black	70 x 70 mm	1,5 mm
#10.50.093	White	10 x 130 mm	3,5 mm

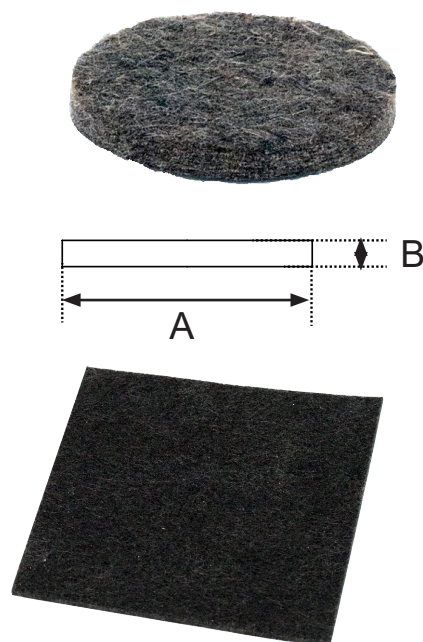


*Other sizes and colors on request.

BUMPER DISCS – SELF ADHESIVE

- Material:** PVC, transparent color.
- Application:** Self adhesive bumpers are the ideal solution to avoid scratching surfaces, prevent objects from skidding or vibrating, cushioning the closing of doors and drawers & equalizing height differences.
- Tip:** Avoid using the bumper discs for at least 24 hours after mounting to guarantee maximum adhesion.



Item - number	Color	A diameter	B height
# 10.39.010	Transparent	Ø7	1,5 mm
# 10.39.015	Transparent	Ø8	1,6 mm
# 10.39.020	Transparent	Ø10	1,5 mm
# 10.39.030	Transparent	Ø10	3,0 mm
# 10.39.040	Transparent	Ø13	4,0 mm



BUMPER DISCS & SUCTION PADS



SUCTION PADS W/HOLLOW PIN

Material: PVC, transparent color.

Application: For glass table tops.
Hollow pin.




Item - number	A diameter	B height	C height	D diameter
# 10.38.210	Ø15	10 mm	4 mm	Ø6
# 10.38.220	Ø20	8,5 mm	6,5 mm	Ø6



SUCTION PADS W/BALL PIN

Material: PVC, transparent color.

Application: For glass table tops.
Ball pin.

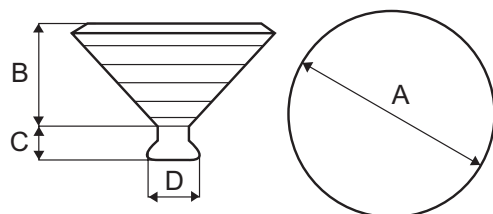

Item - number	A diameter	B height	C height	D diameter
# 10.38.310	Ø20	10 mm	4 mm	Ø6
# 10.38.312	Ø30	13 mm	5 mm	Ø8


SUCTION PAD/BUMPER

Material: PVC, transparent color.

Application: For glass table tops.



Item - number	D diameter	H height	h height	d diameter
# 10.38.010	Ø8	8 mm	6 mm	4 mm
# 10.38.015	Ø14	10 mm	7 mm	8 mm

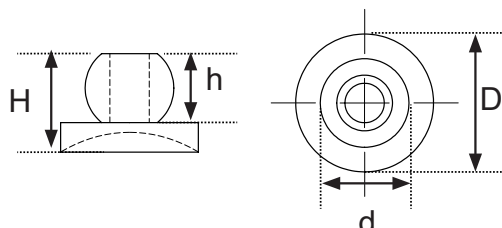

TUBE SLIDES F/CURVED TUBES – SCREW-ON


Material: Polyethylene (PE), black.

Application: For curved round tubes.
With screw holes for fixing.



Item - number	D tube	L length	B width	H height	h height	R radius	A distance	A1 distance
#10.36.010	Ø 22 mm	71 mm	23 mm	30,5 mm	6,5 mm	90	9,5 mm	42,3 mm
#10.36.015	Ø 25 mm	72,5 mm	30 mm	30,2 mm	8,3 mm	80	9,5 mm	42,3 mm
#10.36.020	Ø 32 mm	75 mm	32,5 mm	30 mm	8,3 mm	96	12 mm	28 mm
#10.36.025	Ø 38 mm	75 mm	32 mm	30 mm	8,3 mm	96	12 mm	28 mm

*Minimum quantity: 1000 pcs

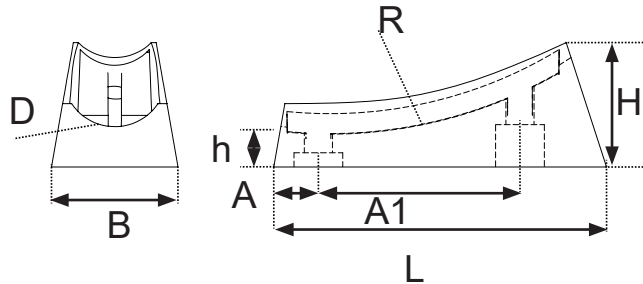

TUBE SLIDES W/FIXATION PIN


Material: Polyethylene (PE), black.

Application: For round tubes with Ø5,7 mm.
fixation pin (d).



Item - number	Ø tube	L length	B width	H height	S thickness
#10.34.010	Ø18-20 mm	28,5 mm	20 mm	18 mm	4 mm
#10.34.020	Ø20-22 mm	29 mm	22 mm	20 mm	4 mm
#10.34.030	Ø22-25 mm	43,5 mm	23,5 mm	21,5 mm	4 mm
#10.34.040	Ø28-30 mm	43 mm	28,5 mm	24,5 mm	4 mm
#10.34.050	Ø30-32 mm	43 mm	29,5 mm	26 mm	4 mm
#10.34.060	Ø32-35 mm	42,5 mm	30 mm	26,5 mm	4 mm



*Minimum quantity: 1000 pcs

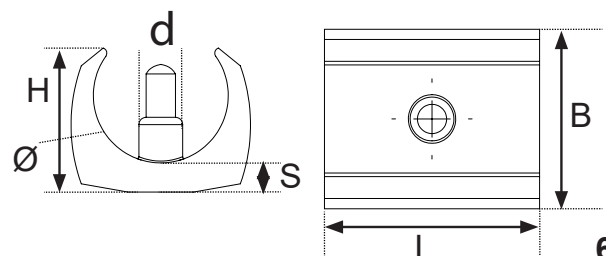

TUBE SLIDES - SCREW-ON

Material: Polyethylene (PE), black.

Application: For round tubes. With screw holes for fixing.




Item - number	D tube	L length	B width	H height	S thickness	Ø screw	A distance
#10.35.010	Ø18-22 mm	53,5 mm	19,8 mm	13,6 mm	7 mm	2 x Ø5,2 mm	33,5 mm
#10.35.020	Ø22-25 mm	49,8 mm	23 mm	10,7 mm	7 mm	1 x Ø5,8 mm	In centre
#10.35.030	Ø28-30 mm	44,8 mm	24,8 mm	11,8 mm	7,7 mm	2 x Ø5,2 mm	22,5 mm
#10.35.040	Ø40 mm	49,8 mm	23 mm	10 mm	6,3 mm	1 x Ø5,5 mm	In centre
#10.35.050	Ø45 mm	46,5 mm	45,8 mm	17,8 mm	7,8 mm	2 x Ø6 mm	22,5 mm

*Minimum quantity: 1000 pcs

NYLON WASHERS

Material: Polyamid (PA), natural.

Item - number	D diameter	d diameter	H height
#12.13.455	6 mm	2,5 mm	0,5 mm
#12.13.456	8 mm	4,3 mm	1,5 mm
#12.13.458	13 mm	8,6 mm	2 mm
#12.13.460	17 mm	8,6 mm	2 mm
#12.13.461	17 mm	8,4 mm	1,5 mm
#12.13.470	20 mm	10,5 mm	2 mm
#12.13.471	20 mm	13 mm	2 mm
#12.13.475	20 mm	10,5 mm	2,5 mm
#12.13.476	20 mm	10,5 mm	2,5 mm
#12.13.480	24 mm	13 mm	2,5 mm
#12.13.500	30 mm	17 mm	3 mm

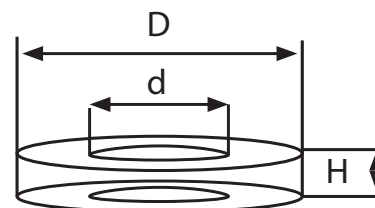

*Other sizes and colors on request.

Minimum quantity: 1000 pcs


DISTANCE SPACERS

Material: Polyethylene (PE), black or white.

Item - number	Color	D diameter	d diameter	H height
#12.13.555	Black	20 mm	5,3 mm	20 mm
#12.13.556	Black	20 mm	5,3 mm	22,5 mm
#12.13.536	Black	22 mm	6,0 mm	10 mm
#12.13.503	Black	20 mm	6,3 mm	3 mm
#12.13.508	Black	20 mm	6,3 mm	7,5 mm
#12.13.533	Black	20 mm	8,4 mm	10 mm
#12.13.538	Black	20 mm	8,4 mm	12,5 mm
#12.13.501	Black	20 mm	10,5 mm	3 mm
#12.13.507	Black	20 mm	10,5 mm	6 mm
#12.13.553	Black	20 mm	10,5 mm	20 mm
#12.13.670	White	30 mm	6,3 mm	10 mm
#12.13.554	Black	40 mm	10,5 mm	20 mm

*Other sizes and colors on request.

Minimum quantity: 1000 pcs

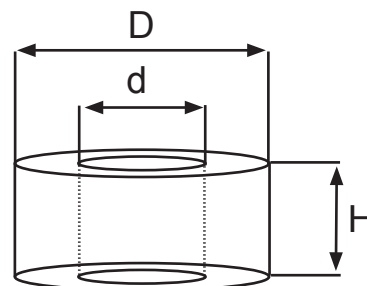

INSERT GLIDES W/10 DG ANGLE - F/SQUARE & RECTANGULAR TUBES

Material: Polyethylene (PE), black.


Application: For square and rectangular tubes with 10 degree angle.



Item - number	Color	D diameter	S shaft	H height
#10.05.010	Black	15 x 15 mm	11,5 mm	7,2 mm
#10.05.020	Black	16 x 16 mm	12 mm	7 mm
#10.05.030	Black	18 x 18 mm	12 mm	7,8 mm
#10.05.040	Black	20 x 20 mm	12 mm	8 mm
#10.05.050	Black	20 x 15 mm	12 mm	9,3 mm
#10.05.060	Black	25 x 15 mm	12 mm	7 mm
#10.05.070	Black	25 x 25 mm	14 mm	8,5 mm
#10.05.080	Black	30 x 15 mm	12 mm	8,3 mm
#10.05.090	Black	30 x 20 mm	14,5 mm	8,5 mm

*Minimum quantity: 1000 pcs

Other sizes & colors on request.

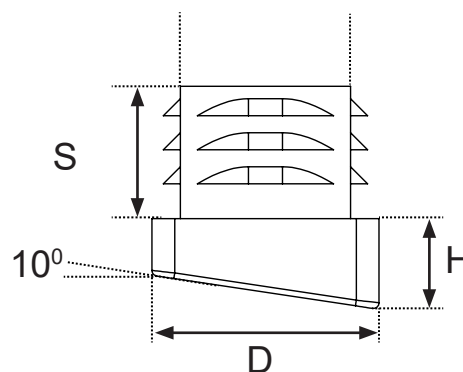


INSERT GLIDES F/RECTANGULAR TUBES

Material: Polyethylene (PE), black.

Application: For rectangular tubes.



Item - number	Color	D diameter	S shaft	H height
#10.04.090	Black	30 x 20 mm	14 mm	5,0 mm
#10.04.110	Black	35 x 20 mm	13,6 mm	5,1 mm
#10.04.120	Black	35 x 25 mm	13,5 mm	4,6 mm
#10.04.160	Black	40 x 20 mm	13,9 mm	4,6 mm
#10.04.170	Black	40 x 25 mm	11,7 mm	4,8 mm
#10.04.230	Black	50 x 25 mm	12,2 mm	5,3 mm
#10.04.240	Black	50 x 30 mm	13,6 mm	4,6 mm
#10.04.250	Black	50 x 40 mm	12 mm	5,3 mm
#10.04.260	Black	60 x 20 mm	14,2 mm	4,9 mm
#10.04.270	Black	60 x 30 mm	13,7 mm	5,0 mm
#10.04.310	Black	80 x 30 mm	17,8 mm	5,6 mm

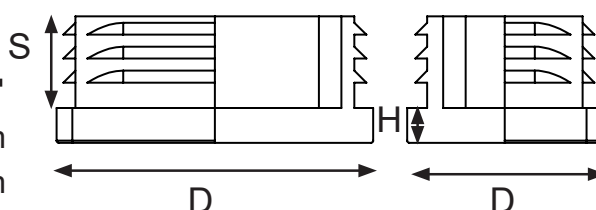

*Minimum quantity: 1000 pcs

Other sizes & colors on request.


INSERT GLIDE F/ OVAL TUBES

Material: Polyethylene (PE), black.

Application: For oval tubes.



Item - number	Color	D diameter	S shaft	H height
#10.02.400	Black	20 x 10 mm	10,5 mm	3,0 mm
#10.02.410	Black	25 x 12 mm	10,5 mm	3,0 mm
#10.02.420	Black	30 x 15 mm	16 mm	2,9 mm
#10.02.440	Black	35 x 20 mm	11,9 mm	5,3 mm
#10.02.450	Black	38 x 20 mm	11,3 mm	4,9 mm
#10.02.460	Black	40 x 20 mm	11,5 mm	4,8 mm
#10.02.480	Black	48 x 20 mm	11,5 mm	4,8 mm
#10.02.490	Black	50 x 20 mm	11,5 mm	4,8 mm

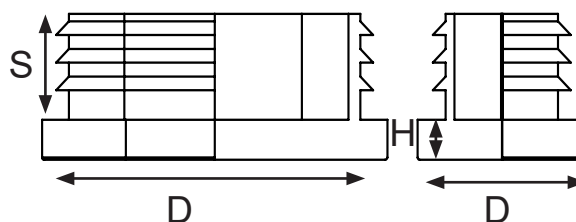

*Minimum quantity: 1000 pcs

Other sizes & colors on request.


INSERT GLIDES F/ROUND TUBES

Material: Polyethylene (PE), black or white.

Application: For round tubes.



Item - number	Color	D diameter	S shaft	H height
#10.02.030	Black	Ø14 mm	9,3 mm	4,0 mm
#10.02.040	Black	Ø15 mm	9,6 mm	4,0 mm
#10.02.070	Black	Ø19 mm	11 mm	4,1 mm
#10.02.080	Black	Ø20 mm	12 mm	4,0 mm
#10.02.090	Black	Ø22 mm	11,8 mm	4,0 mm
#10.02.100	Black	Ø25 mm	11,8 mm	5,0 mm
#10.02.101	White	Ø25 mm	11,8 mm	5,0 mm
#10.02.120	Black	Ø28 mm	14 mm	5,0 mm
#10.02.130	Black	Ø30 mm	14 mm	5,0 mm
#10.02.140	Black	Ø32 mm	14,5 mm	5,0 mm
#10.02.160	Black	Ø35 mm	14,3 mm	5,0 mm
#10.02.185	Black	Ø40 mm	11,7 mm	5,0 mm
#10.02.186	Black	Ø42 mm	11,5 mm	5,0 mm
#10.02.200	Black	Ø50 mm	11,7 mm	5,2 mm

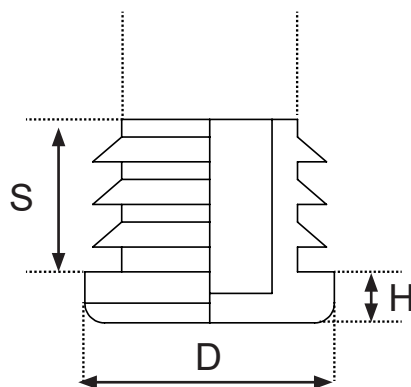

*Minimum quantity: 1000 pcs

Other sizes & colors on request.


INSERT GLIDES W/FELT FOR ROUND TUBES

Material: Polyethylene (PE), black.

Application: For round tubes.



Item - number	Color	D diameter	S shaft	H height
# 10.02.040-9	Black	Ø15 mm	9,6 mm	7,0 mm
# 10.02.070-9	Black	Ø19 mm	11 mm	7,0 mm
# 10.02.080-9	Black	Ø20 mm	12 mm	7,0 mm
# 10.02.090-9	Black	Ø22 mm	11,8 mm	7,0 mm
# 10.02.100-9	Black	Ø25 mm	11,8 mm	8,0 mm
# 10.02.140-9	Black	Ø32 mm	14,5 mm	8,0 mm

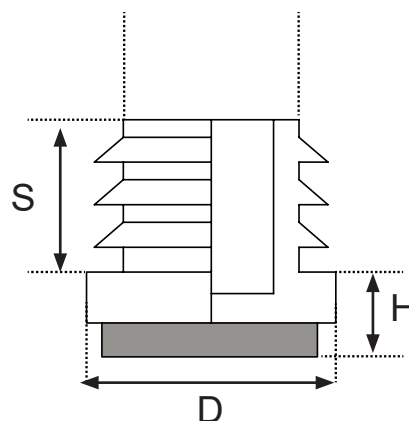


INSERT GLIDES F/SQUARE TUBES

Material: Polyethylene (PE), black or white.

Application: For square tubes.



Item - number	Color	D diameter	S shaft	H height
#10.03.010	Black	12 x 12 mm	11,6 mm	4,0 mm
#10.03.020	Black	16 x 16 mm	12 mm	5,0 mm
#10.03.030	Black	18 x 18 mm	11 mm	5,0 mm
#10.03.050	Black	20 x 20 mm	12 mm	5,0 mm
#10.03.051	White	20 x 20 mm	12 mm	5,0 mm
#10.03.040	Black	22 x 22 mm	14 mm	5,0 mm
#10.03.060	Black	25 x 25 mm	13,5 mm	5,0 mm
#10.03.061	White	25 x 25 mm	13,5 mm	5,0 mm
#10.03.070	Black	30 x 30 mm	13,5 mm	5,0 mm
#10.03.080	Black	40 x 40 mm	14 mm	5,0 mm
#10.03.090	Black	50 x 50 mm	19 mm	5,0 mm
#10.03.100	Black	60 x 60 mm	19 mm	5,0 mm

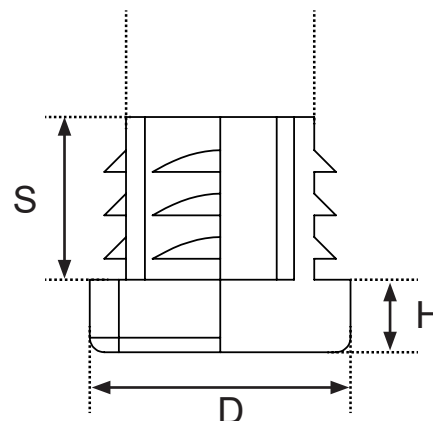


*Minimum quantity: 1000 pcs

Other sizes & colors on request.


INSERT GLIDES W/FELT FOR SQUARE TUBES

Material: Polyethylene (PE), black.

Application: For square tubes.



Item - number	Color	D diameter	S shaft	H height
#10.01.022	Black	16 x 16 mm	18 mm	5,0 mm
#10.03.032	Black	18 x 18 mm	14 mm	5,0 mm
#10.03.052	Black	20 x 20 mm	18 mm	5,0 mm
#10.03.062	Black	25 x 25 mm	18 mm	5,0 mm

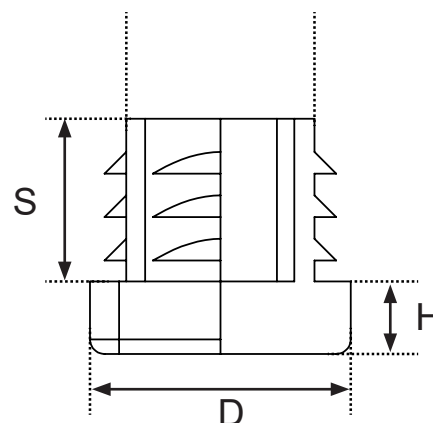


*Minimum quantity: 1000 pcs

Other sizes & colors on request.

INSERT GLIDES W/METAL THREAD - F/SQUARE TUBES

Material: Polyethylene (PE), black.


Application: With metal thread/hex nut.
For square tubes.

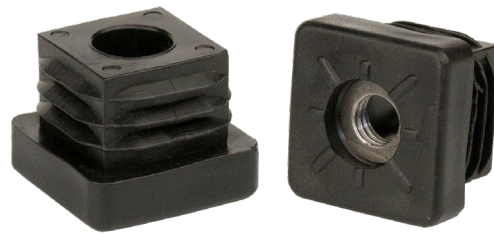

Item - number	Color	D diameter	T thread	S shaft	H height
#10.07.065	Black	20 x 20 mm	M8	14,2 mm	6 mm
#10.07.080	Black	25 x 25 mm	M8	13,6 mm	7 mm
#10.07.081	Black	30 x 30 mm	M10	12,8 mm	8 mm
#10.07.082	Black	40 x 40 mm	M10	13,2 mm	8 mm

*Minimum quantity: 1000 pcs

Other sizes & colors on request.

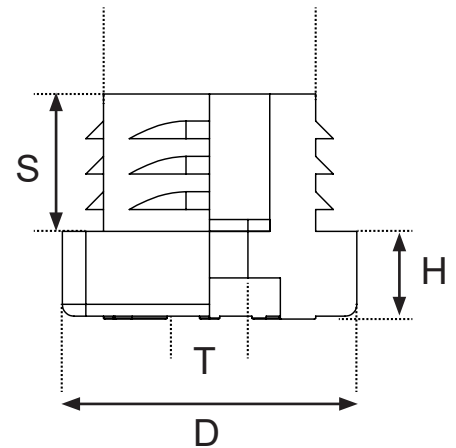

INSERT GLIDES W/METAL THREAD - F/ROUND TUBES

Material: Polyamid (PA), black.


Application: With metal thread/hex nut.
For round tubes.



Item - number	Color	D diameter	T thread	S shaft	H height
#10.06.130	Black	Ø25 mm	M8	7 mm	25 mm
#10.06.135	Black	Ø25 mm	M8	5 mm	33,5 mm
#10.06.200	Black	Ø28 mm	M8	5 mm	33,5 mm
#10.06.350	Black	Ø50 mm	M10	8 mm	25 mm

*Minimum quantity: 1000 pcs


Other sizes & colors on request.

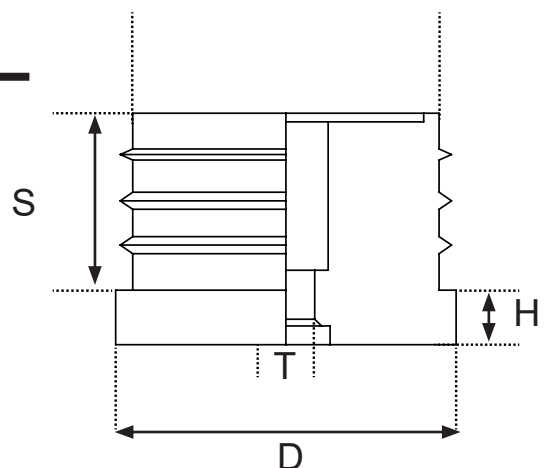

PLASTIC CAPS F/ROUND TUBES

Material: Polyethylene (PE), black or white & PVC, black.

Application: For round tubes.

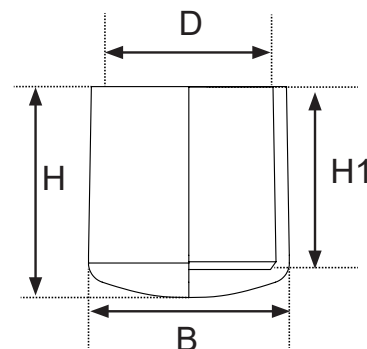

Item - number	Color	Material	D diameter	B diameter	H height	H1 height
#10.01.010	Black	PE	Ø10 mm	Ø13,4 mm	14,6 mm	12,1mm
#10.01.020	Black	PE	Ø13 mm	Ø16,5 mm	18 mm	14 mm
#10.01.021	Black	PE	Ø14 mm	Ø17 mm	16 mm	13,2 mm
#10.01.030	Black	PE	Ø16 mm	Ø19,7 mm	21,2 mm	17 mm
#10.01.040	Black	PE	Ø18 mm	Ø22,3 mm	23,2 mm	19,2 mm
#10.01.050	Black	PE	Ø20 mm	Ø24,2 mm	23,3 mm	18,9 mm
#10.01.060	Black	PE	Ø22 mm	Ø27,6 mm	24,1 mm	20,1 mm
#10.01.070	Black	PE	Ø25 mm	Ø28,1 mm	30,6 mm	24,8 mm
#10.01.071	White	PE	Ø25 mm	Ø28,1 mm	30,6 mm	24,8 mm
#10.01.080	Black	PE	Ø28 mm	Ø32,8 mm	28,8 mm	23,9 mm
#10.01.090	Black	PVC	Ø32 mm	Ø36 mm	30,8 mm	25,5 mm
#10.01.100	Black	PVC	Ø35 mm	Ø39 mm	31,2 mm	25 mm
#10.01.120	Black	PVC	Ø42 mm	Ø46 mm	33 mm	24 mm


*Minimum quantity: 1000 pcs

Other sizes & colors on request.

PLASTIC CAPS W/FELT FOR ROUND TUBES

Material: Transparent EVA

Application: For round tubes.

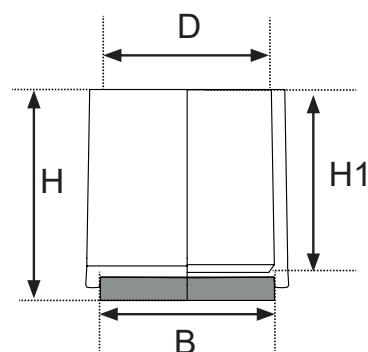

Item - number	Material	D diameter	B diameter	H height	H1 height
# 10.01.130	EVA	Ø14 mm	Ø16 mm	21 mm	16 mm
# 10.01.131	EVA	Ø16 mm	Ø18 mm	21 mm	16 mm
# 10.01.132	EVA	Ø18 mm	Ø20 mm	21 mm	16 mm
# 10.01.133	EVA	Ø20 mm	Ø22 mm	21 mm	16 mm
# 10.01.134	EVA	Ø22 mm	Ø24 mm	21 mm	16 mm
# 10.01.136	EVA	Ø25 mm	Ø27 mm	21 mm	16 mm

*Minimum quantity: 1000 pcs

Other sizes & colors on request.



- high quality furniture fittings

SISO A/S

Mileparken 11 Phone: (+45) 45 830 900
DK - 2740 Skovlunde (Copenhagen) E-mail: siso@siso.dk
Denmark Web: www.siso.dk